

SAMSUNG

COLOR TELEVISION RECEIVER

Chassis : S15A
Model: CK14H1VR5S/NWT
CK2166VR5S/AWT

SERVICE *Manual*

COLOR TELEVISION RECEIVER



CONTENTS

1. Precautions
2. Specifications and IC Data
3. Disassembly and Reassembly
4. Alignment and Adjustment
5. Troubleshooting
6. Exploded View and Parts List
7. Electric Parts List
8. Block Diagram
9. PCB Layout Diagram
10. Wiring Diagram
11. Schematic Diagrams



1. Precautions

Follow these safety, servicing and ESD precautions to prevent damage and protect against potential hazards such as electrical shock and X-rays.

1-1 Safety Precautions

1. Be sure that all of the built-in protective devices are replaced. Restore any missing protective shields.
2. When reinstalling the chassis and its assemblies, be sure to restore all protective devices, including: nonmetallic control knobs and compartment covers.
3. Make sure that there are no cabinet openings through which people—particularly children—might insert fingers and contact dangerous voltages. Such openings include the spacing between the picture tube and the cabinet mask, excessively wide cabinet ventilation slots, and improperly fitted back covers.

If the measured resistance is less than 1.0 megohm or greater than 5.2 megohms, an abnormality exists that must be corrected before the unit is returned to the customer.

4. Leakage Current Hot Check (Figure 1-1):
Warning: Do not use an isolation transformer during this test. Use a leakage-current tester or a metering system that complies with American National Standards Institute (ANIS C101.1, Leakage Current for Appliances), and Underwriters Laboratories (UL Publication UL1410, 59.7).
5. With the unit completely reassembled, plug the AC line cord directly into the power outlet. With the unit's AC switch first in the ON position and then OFF, measure the current between a known earth ground (metal water pipe, conduit, etc.) and all exposed metal parts, including: antennas, handle brackets, metal cabinets, screwheads and control shafts. The current measured should not exceed 0.5 milliamp. Reverse the power-plug prongs in the AC outlet and repeat the test.

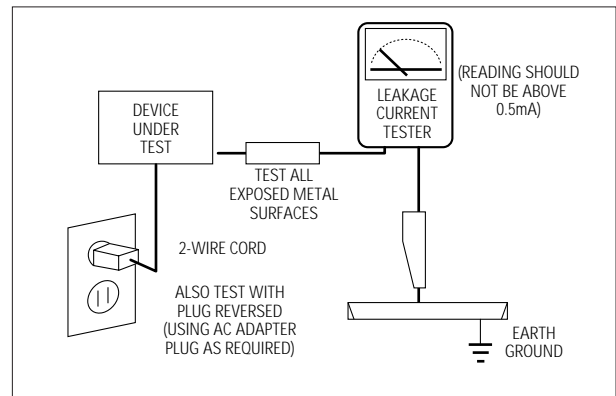


Fig. 1-1 AC Leakage Test



6. Antenna Cold Check:
With the unit's AC plug disconnected from the AC source, connect an electrical jumper across the two AC prongs. Connect one lead of the ohmmeter to an AC prong. Connect the other lead to the coaxial connector.
7. X-ray Limits:
The picture tube is especially designed to prohibit X-ray emissions. To ensure continued X-ray protection, replace the picture tube only with one that is the same type as the original. Carefully reinstall the picture tube shields and mounting hardware; these also provide X-ray protection.
8. High Voltage Limits:
High voltage must be measured each time servicing is done on the B+, horizontal deflection or high voltage circuits. Correct operation of the X-ray protection circuits must be reconfirmed whenever they are serviced.
(X-ray protection circuits also may be called "horizontal disable" or "hold-down".)

Heed the high voltage limits. These include the X-ray Protection Specifications Label, and the Product Safety and X-ray Warning Note on the service data schematic.

1-1 Safety Precautions (Continued)

9. High voltage is maintained within specified limits by close-tolerance, safety-related components and adjustments. If the high voltage exceeds the specified limits, check each of the special components.
10. Design Alteration Warning:
Never alter or add to the mechanical or electrical design of this unit. Example: Do not add auxiliary audio or video connectors. Such alterations might create a safety hazard. Also, any design changes or additions will void the manufacturer's warranty.
11. Hot Chassis Warning:
Some TV receiver chassis are electrically connected directly to one conductor of the AC power cord. If an isolation transformer is not used, these units may be safely serviced only if the AC power plug is inserted so that the chassis is connected to the ground side of the AC source.

To confirm that the AC power plug is inserted correctly, do the following: Using an AC voltmeter, measure the voltage between the chassis and a known earth ground. If the reading is greater than 1.0V, remove the AC power plug, reverse its polarity and reinsert. Re-measure the voltage between the chassis and ground.
12. Some TV chassis are designed to operate with 85 volts AC between chassis and ground, regardless of the AC plug polarity. These units can be safely serviced only if an isolation transformer inserted between the receiver and the power source.
13. Some TV chassis have a secondary ground system in addition to the main chassis ground. This secondary ground system is not isolated from the AC power line. The two ground systems are electrically separated by insulating material that must not be defeated or altered.
14. Components, parts and wiring that appear to have overheated or that are otherwise damaged should be replaced with parts that meet the original specifications. Always determine the cause of damage or overheating, and correct any potential hazards.
15. Observe the original lead dress, especially near the following areas: Antenna wiring, sharp edges, and especially the AC and high voltage power supplies. Always inspect for pinched, out-of-place, or frayed wiring. Do not change the spacing between components and the printed circuit board. Check the AC power cord for damage. Make sure that leads and components do not touch thermally hot parts.
16. Picture Tube Implosion Warning:
The picture tube in this receiver employs "integral implosion" protection. To ensure continued implosion protection, make sure that the replacement picture tube is the same as the original.
17. Do not remove, install or handle the picture tube without first putting on shatterproof goggles equipped with side shields. Never handle the picture tube by its neck. Some "in-line" picture tubes are equipped with a permanently attached deflection yoke; do not try to remove such "permanently attached" yokes from the picture tube.
18. Product Safety Notice:
Some electrical and mechanical parts have special safety-related characteristics which might not be obvious from visual inspection. These safety features and the protection they give might be lost if the replacement component differs from the original—even if the replacement is rated for higher voltage, wattage, etc.

Components that are critical for safety are indicated in the circuit diagram by shading, () or ().
Use replacement components that have the same ratings, especially for flame resistance and dielectric strength specifications. A replacement part that does not have the same safety characteristics as the original might create shock, fire or other hazards.

1-2 Servicing Precautions

Warning1: First read the "Safety Precautions" section of this manual. If some unforeseen circumstance creates a conflict between the servicing and safety precautions, always follow the safety precautions.

Warning2: An electrolytic capacitor installed with the wrong polarity might explode.

1. Servicing precautions are printed on the cabinet. Follow them.
2. Always unplug the unit's AC power cord from the AC power source before attempting to: (a) Remove or reinstall any component or assembly, (b) Disconnect an electrical plug or connector, (c) Connect a test component in parallel with an electrolytic capacitor.
3. Some components are raised above the printed circuit board for safety. An insulation tube or tape is sometimes used. The internal wiring is sometimes clamped to prevent contact with thermally hot components. Reinstall all such elements to their original position.
4. After servicing, always check that the screws, components and wiring have been correctly reinstalled. Make sure that the portion around the serviced part has not been damaged.
5. Check the insulation between the blades of the AC plug and accessible conductive parts (examples: metal panels, input terminals and earphone jacks).
6. Insulation Checking Procedure: Disconnect the power cord from the AC source and turn the power switch ON. Connect an insulation resistance meter (500V) to the blades of the AC plug.

The insulation resistance between each blade of the AC plug and accessible conductive parts (see above) should be greater than 1 megohm.
7. Never defeat any of the B+ voltage interlocks. Do not apply AC power to the unit (or any of its assemblies) unless all solid-state heat sinks are correctly installed.
8. Always connect a test instrument's ground lead to the instrument chassis ground before connecting the positive lead; always remove the instrument's ground lead last.

1-3 Precautions for Electrostatically Sensitive Devices (ESDs)

1. Some semiconductor (“solid state”) devices are easily damaged by static electricity. Such components are called Electrostatically Sensitive Devices (ESDs); examples include integrated circuits and some field-effect transistors. The following techniques will reduce the occurrence of component damage caused by static electricity.
2. Immediately before handling any semiconductor components or assemblies, drain the electrostatic charge from your body by touching a known earth ground. Alternatively, wear a discharging wrist-strap device. (Be sure to remove it prior to applying power—this is an electric shock precaution.)
3. After removing an ESD-equipped assembly, place it on a conductive surface such as aluminum foil to prevent accumulation of electrostatic charge.
4. Do not use freon-propelled chemicals. These can generate electrical charges that damage ESDs.
5. Use only a grounded-tip soldering iron when soldering or unsoldering ESDs.
6. Use only an anti-static solder removal device. Many solder removal devices are not rated as “anti-static”; these can accumulate sufficient electrical charge to damage ESDs.
7. Do not remove a replacement ESD from its protective package until you are ready to install it. Most replacement ESDs are packaged with leads that are electrically shorted together by conductive foam, aluminum foil or other conductive materials.
8. Immediately before removing the protective material from the leads of a replacement ESD, touch the protective material to the chassis or circuit assembly into which the device will be installed.
9. Minimize body motions when handling unpackaged replacement ESDs. Motions such as brushing clothes together, or lifting a foot from a carpeted floor can generate enough static electricity to damage an ESD.

2. Specifications and IC Data

2-1 Specifications

Television System:

MODEL	SYSTEM
CI	PAL-I (UHF)
CII	PAL-I (VHF/UHF)
CX	PAL-B/G, SECAM-B/G
CK	PAL-B/G, D/K, SECAM-B/G, D/K
CW	PAL-B/G, D/K, SECAM-B/G, D/K, NT 4.43
CS	PAL-B/G, D/K, SECAM-B/G, D/K, NT4.43, NT3.58

Channels:

System Band	PAL/SECAM-B/G,I	PAL, SECAM- D/K	SECAM-K1, PAL-D	NTSC - M
VHF	2 - 12	1 - 13	2 - 9	2 - 13
UHF	21 - 69	21 - 69	13 - 57	14-69

Intermediate Frequencies (MHz) :

SYSTEM IF Carrier Frequency	PAL/ SECAM- B/G	PAL/SECAM-D/K, SECAM-K1	PAL - I	NTSC - M
Picture IF Carrier	38.90	38.90	38.90	38.90
Sound IF Carrier	33.40	32.40	32.90	34.40
Color Sub Carrier	34.47	34.47	34.47	35.32

Picture Tube:

14 Inch	A34KQV42X	Quick start, in-line-gun, Black stripe, 90°degree deflection
20 Inch	A48KRD82X(H)	
21 Inch	A51KQJ63X	

Power Requirements:

AC 100~260V, 50/60Hz

Antenna Input Impedance:

VHF, UHF : Telescopic dipole antenna (75 ohm unbalanced type)

Speaker Impedance

8 ohm, 5W+5W (Dual Type)
16 ohm, 3W (Monitor Type & Dual Type)

2-2 IC Line Up

Table 2-1 IC Line-Up			
Loc. No	Specification	Description	Remark
HC101	PAP103	IF PRE-AMP	
IC201	TDA8842 TDA8841	PAL/SECAM-B/G, D/K, NTSC PAL-B/G, D/K, NTSC	Philips
IC301	TDA8356	VERTICAL OUTPUT	
IC501	TDA6107Q	RGB DRIVE AMP	
IC601	TDA7056B	SOUND-AMP (3W x 1CH or 3W x 2CH)	
IC602	TDA7057AQ	SOUND-AMP (5W x 2CH)	Dual Type
IC801	KA3S0680RF	POWER IC (STR)	
IC802	KA7630	CUSTOM REGULATOR (5V, 8V)	
IC901	SZM173EA	W/O TTX, English/French/Arabian	Zilog (Non TTX)
	SZM173AR	W/O TTX, English/Arabian	
	SZM173EV	W/O TTX, English/Vietnamese/Indonesian/Malay	
	SZM173EC	W/O TTX, English/Chinese	
	SZM173ET	W/O TTX, English/Thai	
	SZM173EW	W/O TTX, English/German/French/Dutch/Italian/Spanish, Swedish/Yugo/Greek/Croatian	
	SZM173EE	W/O TTX, English/Romanian/Hungarian/Polish/Czech/Bulgarian	
	SZM173ER	W/O TTX, English/Russian	Philips (TTX)
	SPM175EE	TTX, West : English/German/French/Dutch/Italian/Spanish/Swedish East : English/Czech/Croatian/Romanian/Hungarian/Polish	
	SPM175E	TTX, English/French/Swiss	
	SPM175ER	TTX, English/Russian/Bulgarian	
	SPM175EP	TTX, English/Iranian	
	SPM175EA	TTX, English/French/Arabian	
	SPM175EG	TTX, English/Greek/Yugo	
IC902	24C04/KS24C040	EEPROM	
PC801	TCET1108 / LTV817B	PHOTO COUPLER	

2-3 Semiconductor Base Diagrams


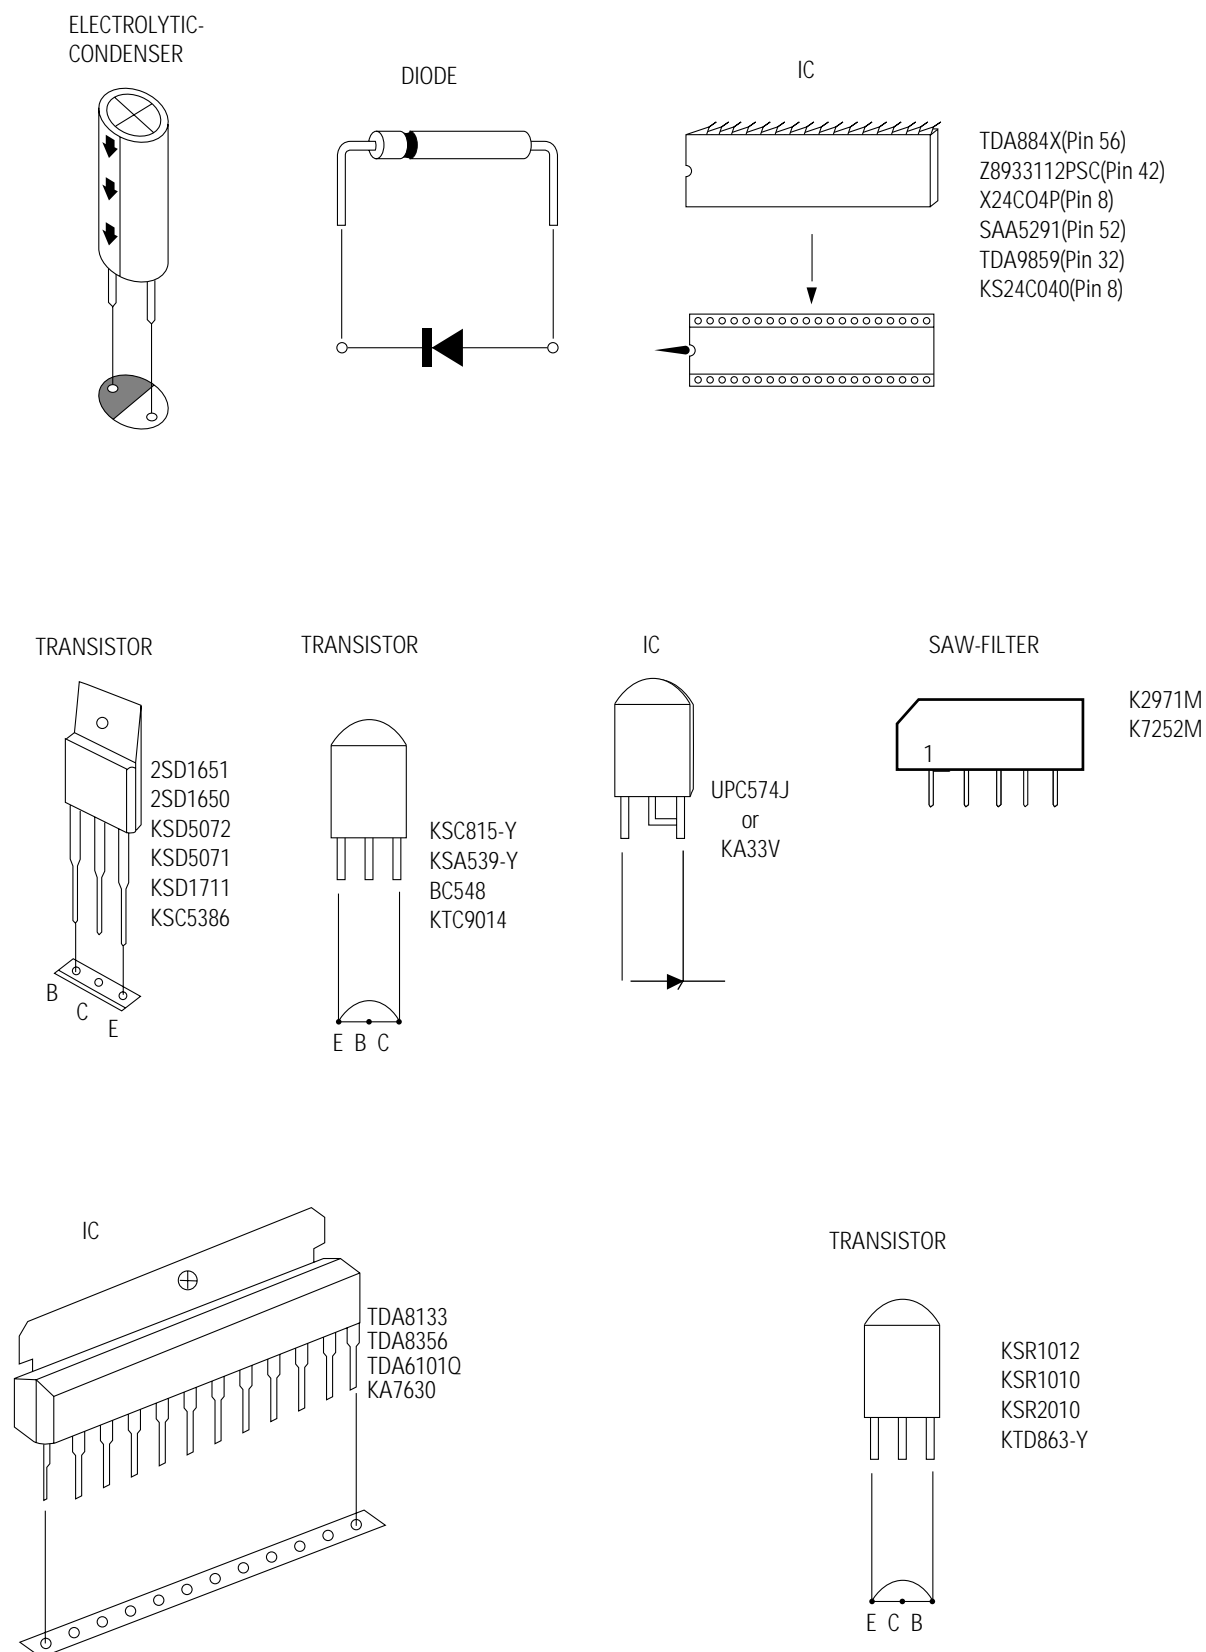


Fig. 2-1 Semiconductor Base Diagrams


MEMO

3. Disassembly and Reassembly



3-1 Back Cover Removal

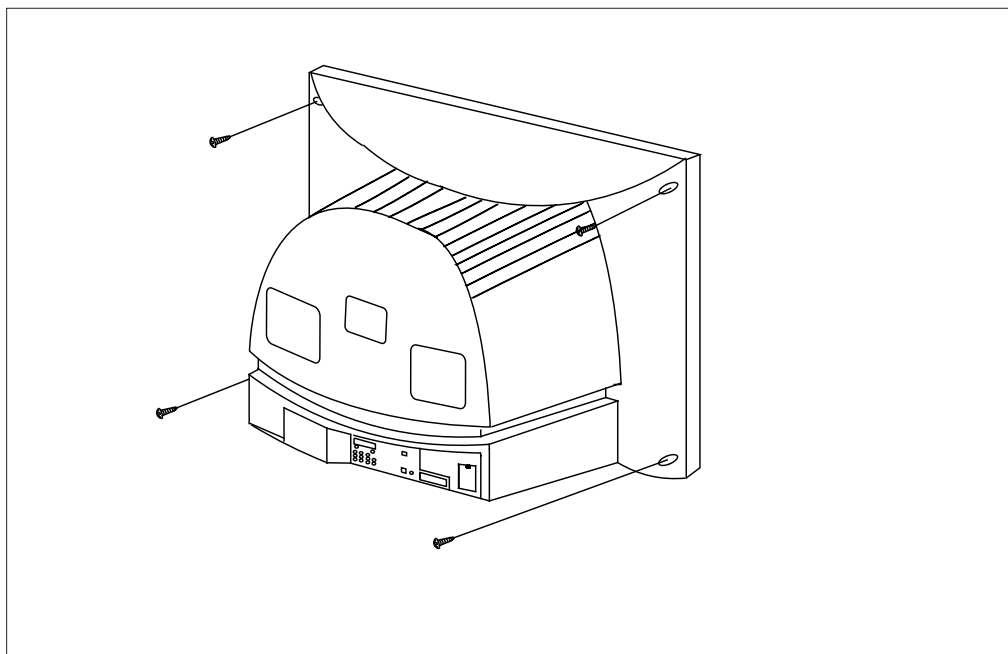

1. After removing the screws, press the tension rib and pull the cabinet backwards.
2. To reassemble, press the tension rib (see diagram).

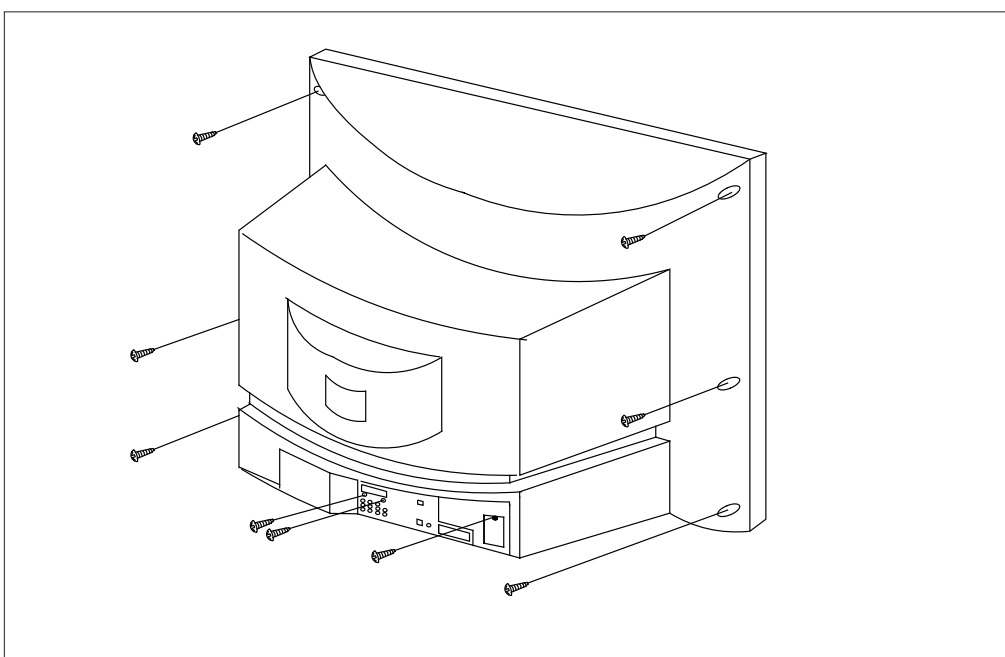


3-2 Main Board Removal

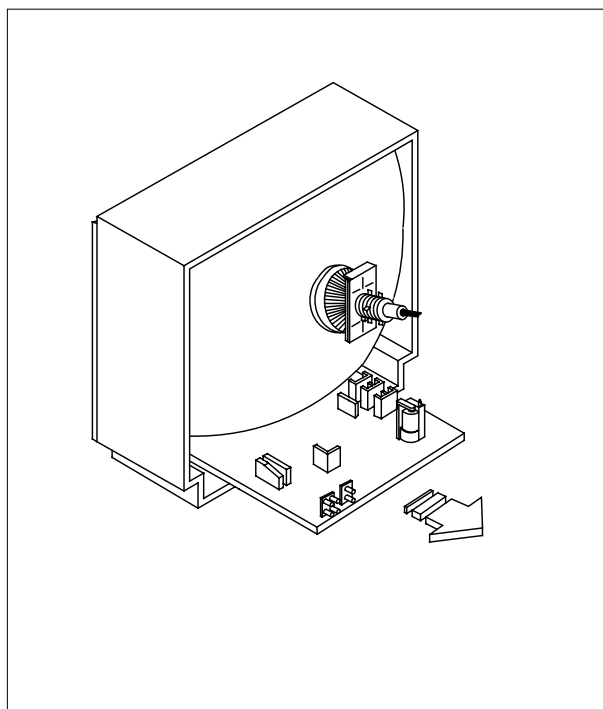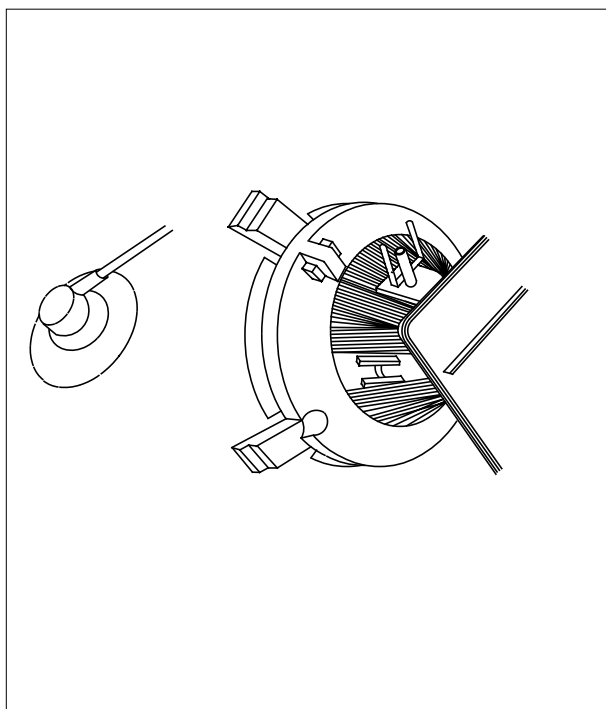


1. Separate the socket board from the CRT neck.
2. Remove the Anode Cap from the CRT.
3. Remove the main board by pulling it with both hands.

Warning: The FBT is charged with high voltage.
Before removing the Anode Cap, discharge the voltage
through one of the heat sinks on the main board.

3-3 Speaker Removal

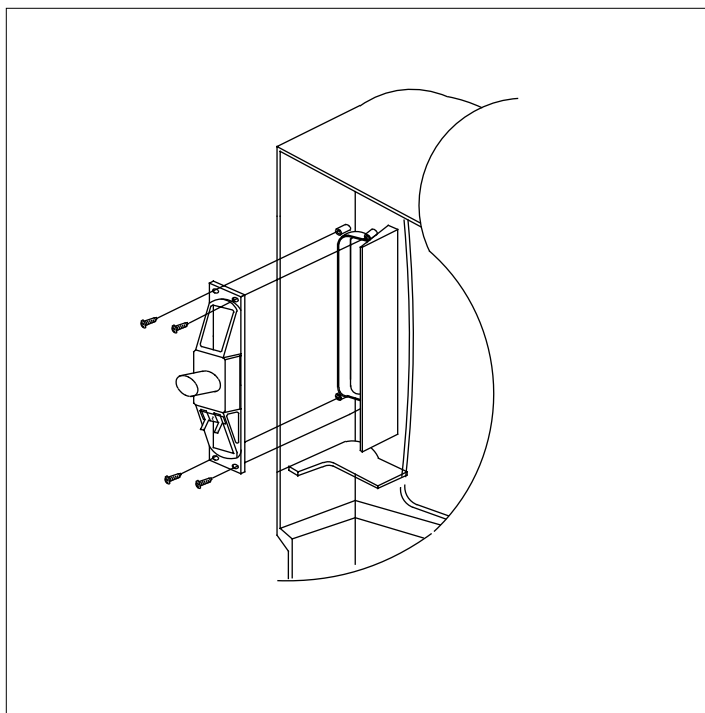


1. Remove the speaker by pressing the tension rib.

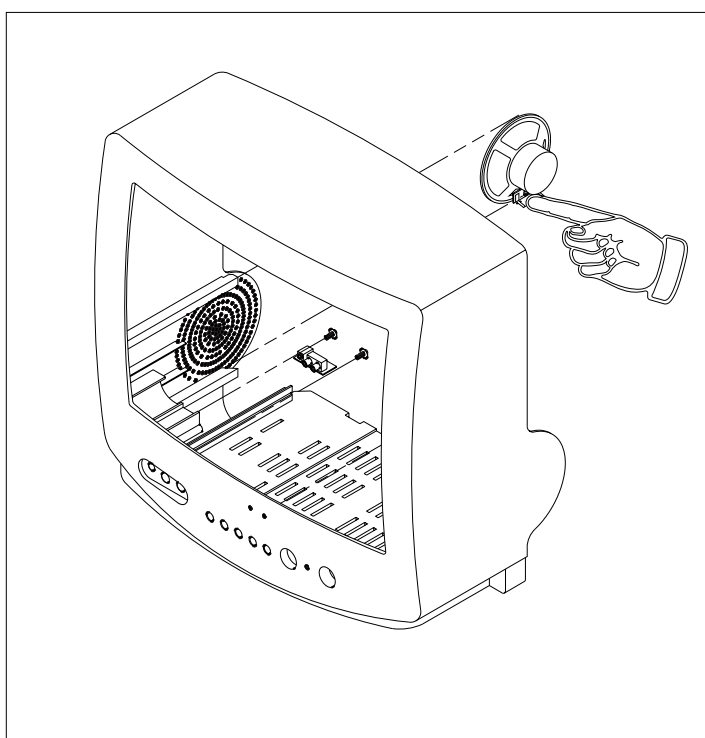

1. Remove the screws.
2. Remove the speaker by pressing the tension rib.

3-4 CRT Removal

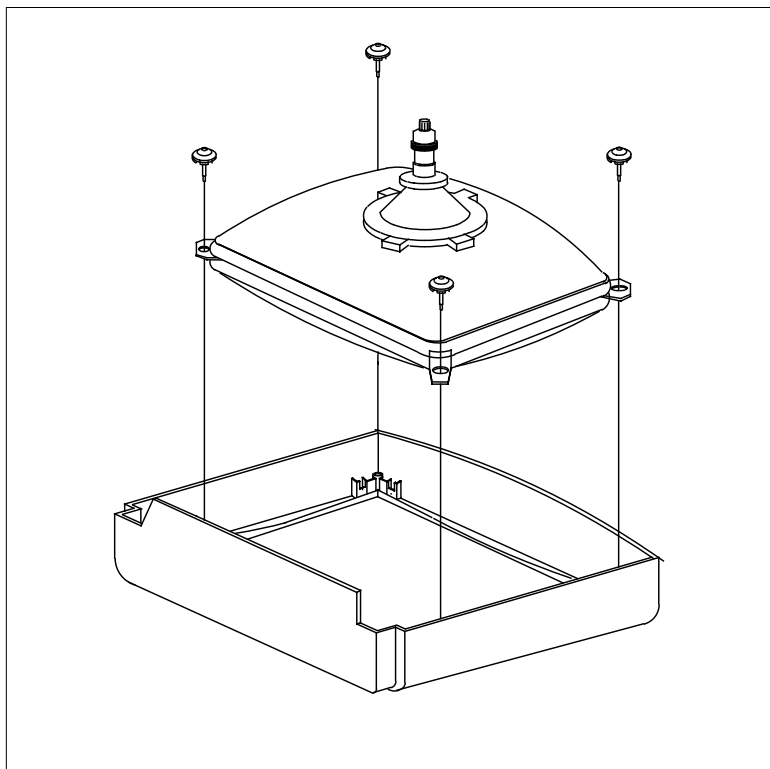

1. Spread a soft mat on the floor. Place the TV set face down.
2. Remove the 4 nuts mounting the CRT to the front cabinet. Lift the CRT.
3. Caution: Because of the high vacuum and large surface area of the picture tube, be careful while handling it: (1) Always lift the picture tube by grasping it firmly around the faceplate, (2) Never lift the tube by its neck. (3) Do not scratch the picture tube or apply excessive pressure. Fractures of the glass may cause an implosion.

4. Alignment and Adjustments

4-1 Preadjustment

4-1-1 Factory Mode

1. Do not attempt these adjustments in the Video Mode.
2. The Factory Mode adjustments are necessary when either the EEPROM (IC902) or the CRT is replaced.
3. Do not tamper with the "Adjustment" screen of the Factory Mode menu. This screen is intended only for factory use.

4-1-2 When EEPROM (IC902) Is Replaced

1. When IC902 is replaced all adjustment data revert to initial values. It is necessary to re-program this data.
2. After IC902 is replaced, warm up the TV for 10 seconds.

4-1-3 When CRT Is Replaced

1. Make the following adjustments AFTER setting up after setting up purity and convergence :
 - White Balance
 - Sub-Brightness
 - Vertical Center
 - Vertical Size
 - Horizontal Size
 - Fail Safe (This adjustment must be the last step).
2. If the EEPROM or CRT is replaced, set PVA to 45 (factory mode) and set SC as follows.
 - 14, 16 inch : 0
 - 20 inch : 10
 - 21 inch : 12

4-2 Factory/Service Mode

4-2-1 Procedure for the "Adjustment" Mode

1. This mode uses the standard remote control. The Service Mode is activated by entering the following remote-control sequence :
 - (1) SLEEP→FACTORY.
 - (2) STAND-BY→DISPLAY→P.STD→MUTE→POWER ON.
2. The "SERVICE (FACTORY)" message will be displayed. The Service Mode has four components: Adjustment, Test Pattern, Option Bytes and Reset.
3. Access the Adjustment Mode by pressing the "VOLUME" keys (Up or Down). The adjustment parameters are listed in the accompanying table, and selected by pressing the CHANNEL keys (▲, ▼).
4. Selection sequences for the all system:
 - DOWN or UP key:
 - AGC>VCO>SBT>SCT>SCR>SC>RG>GG>BG>CDL>BLU>PSL>PVS>PVA>PHS>NSR>STT
5. The VOLUME keys increase or decrease the adjustment values (stored in the non-volatile memory) when Adjustment Mode is cancelled.
6. Cancel the Adjustment Mode by re-pressing the "FACTORY" or "Power OFF" keys.

4-2-2 Main Adjustment Parameter

Table 4-1 Main Adjustment Parameter (Zilog, Philips μ -com)				
FUNCTION	OSD ABBREVIATION	RANGE	INITIAL DATA	REMARK
AUTO GAIN CONTROL	AGC	0 ~ 63 STEP	10	TDA8842 TDA8841
VOLTAGE CONTROL OSCILLATOR	VCO	0 ~ 128 STEP	80	
		0 ~ 1 STEP	1 (For East Europe)	
SUB BRIGHT	SBT	0 ~ 23 STEP	8	
SUB CONTRAST	SCT	0 ~ 23 STEP	10	
SUB COLOR	SCR	0 ~ 23 STEP	10	
S-CORRECTION	SC	0 ~ 63 STEP	12	
RED DRIVE GAIN	RG	0 ~ 63 STEP	47	
GREEN DRIVE GAIN	GG	0 ~ 63 STEP	32	
BLUE DRIVE GAIN	BG	0 ~ 63 STEP	34	
CATHODE DRIVE LEVEL	CDL	0 ~ 7 STEP	4	
BLUE STRETCH MODE	BLU	0 ~ 3 STEP	0	
PAL VERTICAL SLOPE	PSL	0 ~ 63 STEP	32	
PAL VERTICAL SHIFT	PVS	0 ~ 63 STEP	32	
PAL VERTICAL AMPLITUDE	PVA	0 ~ 63 STEP	42	
PAL HORIZONTAL SHIFT	PHS	0 ~ 63 STEP	40	
NTSC SUB COLOR	NSR	0 ~ 23 STEP	7	
SUB TINT	STT	1 ~ 13 STEP	0	
TTX SUB-CONTRAST	TSS	0 ~ 63 STEP	16 (Only TTX Model)	

NOTE : PVS,PVA, PHS, parameters must be aligned using the 50Hz vertical-field rates.

4-2-3 Test Pattern (Aging Mode)

1. This mode can be used during servicing, or for confirming that the convergence and purity adjustments are correct.
2. Access the Test Pattern parameters by pressing a CHANNEL keys (▲, ▼) while the Service Mode is on. The cursor will move to the test pattern. Press the VOLUME keys. On-screen display:

• WHITE — NON -TTX MICOM ONLY

• AGING — TTX MICOM

3. AGING Mode (Reference Only)

This pattern is used for pre-heating the CRT during manufacturing
—it is accessed in the factory by twice pressing the “SLEEP → FACTORY→FACTORY” key, then white pattern will be displayed.

Even if the TV power is cut off, the Aging Mode is not cancelled, The aging mode is cancelled by repressing the “FACTORY” key or pressing the local “CH UP/DOWN” keys.

4-2-4 Option Bytes

In the Service Mode, various can be selected via the Option Bytes (8 bits each). Example:

SYSTEM OSD DISPLAY		BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0 : 8	-			L (BIT : 0)	H (BIT : 8)	L (BIT : 0)	L (BIT : 0)	L (BIT : 0)
BYTE 1 : 0	-	L (BIT : 0)	L (BIT : 0)	L (BIT : 0)	L (BIT : 0)	L (BIT : 0)	L (BIT : 0)	L (BIT : 0)

TDA8842, CK SYSTEM, RCA JACK SYSTEM OSD DISPLAY

BYTE 0 : 11	—————	L (BIT : 1)	H (BIT : 0)	L (BIT : 0)	H (BIT : 0)	L (BIT : 1)
-------------	-------	-------------	-------------	-------------	-------------	-------------

4-2-4 (A) NON-TTX MICOM (SZM-173EC) OPTION BYTE (FOR CHINA/SINGAPORE/GERMAN ARMY)

	Destination	BYTE 0	BYTE 1
MP (Massproduction) OPTION BYTE	China	15	58
	Singapore	57	58
	German Army	57	18
	Hotel (CB)	59	1A

BYTE	BIT	LOW (0)	HIGH (1)	Application MICOM		
B Y T E 0	D7	NOT USED		MUST LOW		
	D6	TV : NORMAL → ZOOM A/V :NORMAL → ZOOM	TV: NORMAL → ZOOM → 16:9 A/V : NORMAL → ZOOM	MUST = LOW : China (only) 16 : 9 (Delete)		
	D5	NOT USED		MUST = LOW		
	D4	CH Up/down functional in the A/V Mode (SCART Jack)	CH Up/down not functional in the A/V Mode (RCA Jack)	MUST = HIGH		
	D3	Sound-I System Used	Sound-I System Not Used			
	D2	D2	D1	COLOR SYSTEM	SOUND SYSTEM	Remark
		0	0	● CB : NO OSD		China MP : CD German Army : CS <div>D3 BIT OPTION</div>
		0	1	● CW : ■ RF : AUTO → PAL → SECAM → NT4.43 ■ A/V : AUTO → PAL → SECAM → NT4.43 → NT3.58	"?" → B/G → D/K → I	
	D1	1	0	● CD : ■ RF : AUTO → PAL → NT4.43 ■ A/V : AUTO → PAL → NT4.43 → NT3.58	"?" → D/K ↔ I	
		1	1	● CS : ■ RF: AUTO → PAL → SECAM → NT4.43 → NT3.58 ■ A/V: AUTO → PAL → SECAM → NT4.43 → NT3.58	"?" → B/G → D/K → (I) → NT- M	
	D0	TDA8374A	TDA8842	IC201 (ONE-CHIP) OPTION		
B Y T E 1	D7	TV OUT	MONITOR OUT			
	D6	English ONLY	English/Chinese	MUST = HIGH		
	D5	AFT ON (always)	AFT OFF (after fine tuning)	BASIC = LOW		
	D4	Existing Sharpness level (when using the TDA6108 RGB AMP)	Sharpness level up (when using the TDA6107Q RGB AMP)	BASIC = HIGH		
	D3	No Auto Power On	Auto Power On	BASIC = HIGH		
	D2	NTSC : 25KHz (NTSC TABLE) PAL : 50KHz (PAL TABLE)	NTSC : 25KHz (NTSC TABLE) PAL : 27KHz (NTSC TABLE)			
	D1	Others	HOTEL			
	D0	NOT USED MUST LOW				

- Function Required :
1. PICTURE OFF (after 15 minutes) during no signal
 2. AUDIO MUTE during no signal
 3. BLUE SCREEN ON/OFF
 4. TIMER CLOCK ON/OFF
 5. No CHILD LOCK

4-2-4 (B) NON-TTX MICOM (SZM-173EW/EE) OPTION BYTE (FOR EUROPE)

		Destination	BYTE 0	BYTE 1
MP OPTION BYTE		United Kingdom	C3	98
		France/Swiss	45	9A
		Western Europe (except UK)	45	98
		Eastern Europe	41	58
		Ireland (CII)	43	98
BYTE	BIT	LOW(0)	HIGH(1)	Remark
B Y T E 0	D7	3 BAND	UHF ONLY	HIGH (UK only)
	D6	TV : NORMAL → ZOOM A/ : NORMAL → ZOOM	TV : NORMAL → ZOOM → 16:9 A/V : NORMAL → ZOOM	MUST = HIGH
	D5	MUST LOW		POLAND OPTION - R 913 : 680Ω added - J901 : delete
	D4	CH Up/down functional in the A/V Mode (SCART Jack)	CH Up/down not functional in the A/V Mode (RCA Jack)	MUST = LOW
	D3	NOT USED		MUST = LOW
	D2	D2 D1	SOUND SYSTEM	COLOR SYSTEM
	D1	0 0	"?" → B/G ↔ D/K : CK MODEL	Destination Eastern Europe/France/Swiss
		0 1	I ONLY (NO OSD) : CI,CII MDL	United Kingdom
		1 0	B/G ONLY (NO OSD) : CB,CX MDL	Western Europe
		1 1	NOT USED	
	D0	TDA8374A	TDA8842	IC201 (ONE-CHIP) OPTION
B Y T E 1	D7		English/German/Dutch/Italian/Spanish/ Swedish/Croatian/Yugo/Greek/French	Western Europe (SZM-173EW/EW1)
	D6		English/Romanian/Hungarian/Polish/ Czech/Bulgarian	Eastern Europe (SZM-173EE)
	D5	AFT ON (always)	AFT OFF (after fine tuning)	MUST = LOW
	D4	Existing sharpness level : TDA6108	Sharpness level up : TDA6107Q	MUST = HIGH
	D3	No Auto Power On	Auto Power On	MUST = HIGH
	D2	NTSC : 25 KHz (NTSC TABLE) PAL : 50 KHz (PAL TABLE)	NTSC : 25KHz(NTSC TABLE) PAL : 27KHz(NTSC TABLE)	
	D1	PAL / SECAM	SECAM - L	- France/Swiss (only) : HIGH
	D0	MUST : LOW		

● P-STD Classification (CON./BRI./SHAR./COL)

STANDARD MODE	DYNAMIC MODE	MOVIE MODE	MILD MODE	CUSTOM MODE
90/50/50/50	100/50/75/50	90/50/75/50	60/50/50/50	90/50/50/50

- Function Required: 1. PICTURE OFF (after 15 minutes) during no signal. 2. AUDIO MUTE during no signal.
3. No BLUE SCREEN during no RF signal (Blue Screen during AV).
4. No TIMER. 5. No CHILD LOCK. 6. See "Detailed functions of CF".

4-2-4 C) NON-TTX MICOM (SZM-173ER) OPTION BYTE (FOR RUSSIA)

Destination	BYTE 0	BYTE 1
Russia,CIS	49	58
Australia	5D	18
India (CB MONO MODEL)	5D	38

BYTE	BIT	LOW(0)	HIGH(1)	Remark																				
B Y T E 0	D7			MUST = LOW																				
	D6	TV : NORMAL → ZOOM A/V : NORMAL → ZOOM	TV : NORMAL → ZOOM → 16:9 A/V : NORMAL → ZOOM	MUST = HIGH																				
	D 5			MUST = LOW																				
	D4	CH Up/down functional in the A/V Mode (SCART Jack)	CH Up/down not functional in the A/V Model (RCA Jack)																					
	D3	PAL-I Used	PAL-I Not Used	MUST = HIGH																				
	D 2	<table><tr><td>D2</td><td>D1</td><td>SOUND SYSTEM</td><td>COLOR SYSTEM</td></tr><tr><td>0</td><td>0</td><td>"?" → B/G ↔ D/K : CK MODEL</td><td>AUTO : NO OSD</td></tr><tr><td>0</td><td>1</td><td>I ONLY (NO OSD) : CI,CII MDL</td><td></td></tr><tr><td>1</td><td>0</td><td>B/G ONLY (NO OSD) : CB,CX MDL</td><td></td></tr><tr><td>1</td><td>1</td><td>NOT USED</td><td></td></tr></table>		D2	D1	SOUND SYSTEM	COLOR SYSTEM	0	0	"?" → B/G ↔ D/K : CK MODEL	AUTO : NO OSD	0	1	I ONLY (NO OSD) : CI,CII MDL		1	0	B/G ONLY (NO OSD) : CB,CX MDL		1	1	NOT USED		
	D2	D1	SOUND SYSTEM	COLOR SYSTEM																				
	0	0	"?" → B/G ↔ D/K : CK MODEL	AUTO : NO OSD																				
	0	1	I ONLY (NO OSD) : CI,CII MDL																					
	1	0	B/G ONLY (NO OSD) : CB,CX MDL																					
1	1	NOT USED																						
D 1																								
D0	TDA8374A	TDA8842	IC201 (ONE-CHIP) OPTION																					
B Y T E 1	D7			MUST = LOW																				
	D6	English	English/Russian																					
	D5	AFT ON (always)	AFT OFF (after fine tuning)	BASIC = LOW (India HIGH)																				
	D4	Existing sharpness level (when using the TDA6108 RGB AMP)	Sharpness level up (when using the TDA6107Q AMP)	MUST = HIGH																				
	D3	No Auto Power On	Auto Power On	BASIC = HIGH																				
	D2	NTSC: 25 KHz (NTSC TABLE) PAL : 50 KHz (PAL TABLE)	NTSC : 25 KHz (NTSC TABLE) PAL : 27 KHz (NTSC TABLE)																					
	D1	NOT USED (MUST = LOW)																						
	D0																							

● P-STD Classification (CON/BRI/SHAR/COL)

STANDARD MODE	DYNAMIC MODE	MOVIE MODE	MILD MODE	CUSTOM MODE
90/50/50/50	100/50/75/50	90/50/75/50	60/50/50/50	90/50/50/50

- Function Required :
1. PICTURE OFF (after 15 minutes) during no signal
 2. AUDIO MUTE during no signal
 3. BLUE SCREEN available
 4. TIMER available
 5. No CHILD LOCK

4-2-4 (D) NON-TTX MICOM (SZM-173AR/EA) OPTION BYTE (FOR MIDDLE EAST/AFRICA)

		Destination		BYTE 0	BYTE 1	
MP OPTION BYTE		Middle East (EA or AR)		7F	58	
		Africa (EA)		67	D8	
		GAME (Middle East)		7F	5A	
BYTE	BIT	LOW (0)		HIGH (1)	Remark	
B Y T E 0	D7				MUST = LOW	
	D6	TV : NORMAL → ZOOM A/V : NORMAL → ZOOM		TV : NORMAL → ZOOM → 16:9 A/V : NORMAL → ZOOM	MUST = HIGH	
	D5	NOT USED		CHILD LOCK ON	MUST = HIGH	
	D4	CH Up/down functional in the A/V Mode (SCART Jack)		CH Up/down not functional in the A/V Model (RCA Jack)	Middle East : HIGH Africa : LOW	
	D3	Sound-I System Used		Sound-I System Not Used		
	D 2	D2	D1	COLOR SYSTEM		SOUND SYSTEM
		0	0	● CK : AUTO (NO OSD)		"?" → B/G → D/K
		0	1	● CW : -. RF : AUTO → PAL → SECAM → NT4.43 -. A/V : AUTO → PAL → SECAM → NT4.43 → NT3.58		"?" → B/G → D/K → I
	D 1	1	0	● CB : - RF : PAL ONLY - A/V : AUTO → PAL → NT4.43 → NT3.58		B/G ONLY (NO OSD)
		1	1	● CS : -. RF : AUTO → PAL → SECAM → NT4.43 → NT3.58 -. A/V : AUTO → PAL → SECAM → NT4.43 → NT3.58		"?" → B/G → D/K → I → NT- M →
	D0	TDA8374A		TDA8842	IC201 (ONE-CHIP) OPTION	

B Y T E 1	D7	D7	D6	LANGUAGE	Remark	
		0	0	-	NOT USED	
		0	1	ENG / ARAB	Middle East	
		1	0	-	NOT USED	
	D6	1	1	ENG / ARAB / FRENCH	EA VERSION (Africa ONLY)	
	D5	AFT ON (always)			AFT OFF after fine tuning	MUST = LOW
	D4	Existing sharpness level (when using the TDA6108 RGB AMP)			Sharpness level up (when using the TDA6107Q RGB AMP)	MUST = HIGH
	D3	No Auto Power On			Auto Power On	MUST = HIGH
	D2	NTSC : 25 KHz (NTSC TABLE) PAL : 50 KHz (PAL TABLE)			NTSC : 25 KHz (NTSC TABLE) PAL : 27 KHz (NTSC TABLE)	
	D1	Others			GAME	
	D0	MUST = LOW				

- Function Required :
1. PICTURE OFF (after 15 minutes) during no signal
 2. AUDIO MUTE during no signal.
 3. BLUE SCREEN ON/OFF
 4. TIMER (CLOCK ON/OFF)
 5. CHILD LOCK ON (always)

4-2-4 (E) NON-TTX MICOM (SZM-173EV/ET) OPTION BYTE (FOR ASIA)

	DESTINATION	LINE-STREEO		MONO(TV-OUT)		MONO(MONO-OUT)	
		BYTE 0	BYTE 1	BYTE 0	BYTE 1	BYTE 0	BYTE 1
OPTION - BYTE	Vietnam / Malaysia	DF	D8	5F	58	5F	D8
	Indonesia (CB MODEL CLOCK ON)	DD	DA	5D	5A	5D	DA
	Thailand (CB MODEL)	—		5D	58	5D	D8
	India (CB MODEL AFT OFF)	DD	B8	—	—	—	—
	India (CS MODEL AFT OFF)	DF	B8	5F	38	5F	B8

BYTE	BIT	LOW (0)		HIGH (1)		Remark	
B Y T E 0	D7	LINE STEREO OFF		LINE STEREO ON		SZM-173EV (only)	
	D6	TV : NORMAL → ZOOM A/V : NORMAL → ZOOM		TV : NORMAL → ZOOM → 16:9 A/V : NORMAL → ZOOM		MUST = HIGH	
	D5					MUST = LOW	
	D4	CH Up/down functional in the A/V Mode (SCART Jack)		CH Up/down not functional in the A/V Mode (RCA Jack)		BASIC = HIGH	
	D3	Sound-I System Used		Sound-I System Not Used			
	D2	D2	D1	COLOR SYSTEM		SOUND SYSTEM	Destination
		0	0	● CK :AUTO (NO OSD)		"?" → B/G→ D/K	
		0	1	● CW : -. RF : AUTO → PAL → SECAM → NT4.43 -. A/V : AUTO → PAL → SECAM → NT4.43 → NT3.58		"?" → B/G → D/K → I	
	D1	1	0	● CB : - RF : PAL ONLY - A/V : AUTO → PAL → NT4.43 → NT3.58		B/G ONLY (NO OSD)	Indonesia/Thailand/ India
		1	1	● CS: - RF : AUTO → PAL → SECAM → NT4.43 → NT3.58 -A/V : AUTO → PAL → SECAM → NT4.43 → NT3.58		"?" → B/G→ D/K → I NT- M→	Vietnam Malaysia
	D0	TDA8374A		TDA8842		IC201 (ONE-CHIP) OPTION	
B Y T E 1	D7	TV OUT		MONITOR OUT			
	D6	English ONLY		English/Vietnamese/Indonesian/Malay		SZM-173EV	
				English/Thai		SZM-173ET	
	D5	AFT ON (always)		AFT OFF (after fine tuning)			
	D4	Existing sharpness level (when using the TDA6108 RGB AMP)		Sharpness level up (when using the TDA6107Q RGB AMP)		MUST = HIGH	
	D3	No Auto Power On		Auto Power On		BASIC = HIGH	
	D2	NTSC : 25KHz (NTSC TABLE) PAL : 50KHz (PAL TABLE)		NTSC : 25KHz (NTSC TABLE) PAL : 27KHz (PAL TABLE)		MUST = LOW	
	D1	CLOCK DISPLAY OFF		CLOCK DISPLAY ON		Indonesia ONLY : HIGH	
D0	MUST = LOW						

- Function Required : 1. PICTURE OFF (after 15 minutes) during no signal. 2. AUDIO MUTE during no signal.
3. BLUE SCREEN ON/OFF. 4. TIMER (CLOCK ON/OFF). 5. No CHILD LOCK

SZM -173ET (16K) : Z90203 → WITHOUT LINE STEREO

SZM -173EV (24K) : Z90234 → WITH LINE STEREO

4-2-4 (F) TTX MICOM (SZM-175EA/EP) OPTION BYTE (FOR MIDDLE EAST ASIA)

MP OPTION BYTE	Destination		Application MICOM		BYTE0	BYTE1
	Iran (Persian TTX)		SPM-175EP		1F	1B
	Middle East (except Iran)		SPM-175EA		1F	1B
	Africa				07	1B
	Singapore				17	1B

BYTE	BIT	LOW (0)		HIGH (1)		Application MICOM		
B Y T E 0	D7	NOT USED				ALL = LOW		
	D6	TV : NORMAL → ZOOM → 16:9 A/V : NORMAL → ZOOM		TV : NORMAL → ZOOM → 16:9 A/V : NORMAL → ZOOM → 16:9		MUST = LOW		
	D5	NOT USED				ALL = LOW		
	D4	CH Up/down functional in the A/V Mode (SCART Jack)		CH Up/down not functional in the A/V Mode (RCA Jack)		- Africa : SCART - Others : RCA		
	D3	Sound-I System Used		Sound-I System Not Used				
	D2	D2	D1	COLOR SYSTEM		SOUND SYSTEM		Remark
		0	0	● CK : AUTO (NO OSD)		"?" → B/G → D/K		No sound system in the A/V MODE
		0	1	● CW : ■ RF : AUTO → PAL → SECAM → NT4.43 ■ A/V : AUTO → PAL → SECAM → NT4.43 → NT3.58		"?" → B/G → D/K → I →		
	D1	1	0	● CB : ■ RF : PAL ONLY (NO OSD) ■ A/V : AUTO → PAL → NT4.43 → NT3.58		B/G ONLY (NO OSD)		
		1	1	● CS : ■ RF : AUTO → PAL → SECAM → NT4.43 → NT3.58 ■ A/V : AUTO → PAL → SECAM → NT4.43 → NT3.58		"?" → B/G → D/K → I → NT → M →		
	D0	TDA8374A		TDA 8842				

B Y T E 1	D7	NOT USED				ALL (FIX = LOW)		
	D6							
	D5							
	D4	Existing sharpness level (when using the TDA6108 RGB AMP)		Sharpness level up (when using the TDA6107Q RGB AMP)		ALL (BASIC = HIGH) → TEST Unnecessary		
	D3	No Auto Power On		Auto Power On		ALL (BASIC = HIGH)		
	D2	NTSC : 25 KHz (NTSC TABLE) PAL : 50 KHz (PAL TABLE)		NTSC : 25 KHz (NTSC TABLE) PAL : 27 KHz (NTSC TABLE)				
	D1	D1 D0		00	01	10	11	MUST = HIGH
	D0			B/G	D/K	I	?	

● OSD language by micom

1. Persian (for Iran) : SPM-175EP : English/Persian (Iranian)
2. Arab (Middle East, Africa) : SPM-175EA : English/French/Arabian

● Function Required : 1. PICTURE OFF (after 15 minutes) during no signal

2. AUDIO MUTE (during no signal)
3. No BLUE SCREEN
4. No TIMER
5. No CHILD LOCK

4-2-4 (G) TTX MICOM (SPM-175EE/ER/EG/EU) OPTION BYTE (FOR EUROPE)

		Destination		Application MICOM		BYTE 0		BYTE 1		LANGUAGE	
MP OPTION BYTE		United Kingdom (CI)		SPM-175EE		83		18		See BYTE 1 D5	
		Other Western Europe (CB)				05		18			
		Eastern Europe (CK)				01		38			
		Ireland (CII)				03		18			
		France/Swiss		SPM-175EU		05		58		English/Yugo/Greek	
		Yugo/Greece		SPM-175EG		05		18			
		Russia/Bulgaria		SPM-175ER		01		19		English/Russian/Bulgarian	
BYTE	BIT	LOW(0)				HIGH(1)				Remark	
B Y T E 0	D7	3 BAND				UHF DNLY (UK only)					
	D6	TV : NORMAL → ZOOM → 16:9 A/V : NORMAL → ZOOM				TV : NORMAL → ZOOM → 16:9 A/V : NORMAL → ZOOM → 16:9					
	D5	MUST = LOW				<POLAND OPTION> R 913 : 680Ω added. J901 : Delete					
	D4	CH Up/Down functional in the A/V Mode (SCART Jack)				CH Up/Down not functional in the A/V Model (RCA Jack)				MUST = LOW	
	D3	P-STD NORMAL				P-STD MAX				MUST = LOW	
	D2	D2	D1	SOUND SYSTEM				COLOR SYSTEM		Remark	
		0	0	"?" → B/G ↔ D/K : CK MODEL				AUTO (NO OSD)		No SOUND SYSTEM in the A/V Mode	
		0	1	I ONLY (NO OSD) : CI,CII MODEL							
		D1	1	0	B/G ONLY (NO OSD): CB,CX MODEL						
	1		1	NOT USED							
D0	TDA8374A				TDA8842						
B Y T E 1	D7	NOT USED								FIX = LOW	
	D6	PAL/SECAM				SECAM - L				HIGH (CF only)	
	D5	English/German/French/Dutch/ Italian/Spanish/Swedish				English/Croatian/Romanian/ Hungarian/Polish/Czech				This bit is only applied to SPM-175EE	
	D4	Existing sharpness level (when using the TDA6108 RGB AMP)				Sharpness level up (when using the TDA6107Q AMP)				ALL BASIC = HIGH → TEST Unnecessary	
	D3	No Auto Power On				Auto Power On				ALL BASIC = HIGH	
	D2	NTSC : 25KHz (NTSC TABLE) PAL : 50KHz (PAL TABLE)				NTSC : 25KHz (NTSC TABLE) PAL : 27KHz (NTSC TABLE)				ALL (RF VOL. CURVE) BASIC = LOW	
	D1	MUST = LOW									
	D0	B/G				D/K				175ER is only applied (Others = LOW)	

● P-STD Classification (CON/BRI/SHRP/COL)

D3 BIT	STANDARD MODE	DYNAMIC MODE	MOVIE MODE	MILD MODE	CUSTOM MODE
0	90/50/50/50	100/50/50/50	75/55/50/50	60/50/50/50	90/55/25/50

- Function Required : 1. PICTURE OFF (after 15 minutes) during no signal. 2. AUDIO MUTE (during no signal).
3. No BLUE SCREEN. 4. No TIMER (CLOCK /OFF). 5. No CHILD LOCK

4-2-5 RESET

The Reset Mode is used during factory inspection.
Function Reset:

1. Channels	Add/Erase
2. Sort	Non
3. System	Auto
4. Timer	off
5. Blue Screen	off
6. Child Lock	off
7. Picture	standard
8. Volume	10
9. CH. Skip	Erased

4-3 Other Adjustments

4-3-1 General

1. Usually, a color TV needs only slight touch-up adjustment upon installation. Check the basic characteristics such as height, horizontal and vertical sync and focus.
2. The picture should have good black and white details. There should be no objectionable color shading; if color shading is present, perform the purity and convergence adjustments described below.
3. Use the specified test equipment or its equivalent.
4. Correct impedance matching is essential.
5. Avoid overload. Excessive signal from a sweep generator might overload the front-end of the TV. When inserting signal markers, do not allow the marker generator to distort test results.
6. Connect the TV only to an AC power source with voltage and frequency as specified on the backcover nameplate.
7. Do not attempt to connect or disconnect any wires while the TV is turned on. Make sure that the power cord is disconnected before replacing any parts.
8. To protect against shock hazard, use an isolation transformer.

4-3-2 Automatic Degaussing

A degaussing coil is mounted around the picture tube, so that external degaussing after moving the TV should be unnecessary. But the receiver must be properly degaussed upon installation.

The degaussing coil operates for about 1 second after the power is switched ON. If the set has been moved or turned in a different direction, disconnect its AC power for at least 30 minutes.

If the chassis or parts of the cabinet become magnetized, poor color purity will result. If this happens, use an external degaussing coil. Slowly move the degaussing coil around the faceplate of the picture tube and the sides and front of the receiver. Slowly withdraw the coil to a distance of about 6 feet before removing power.

4-3-3 High Voltage Check

CAUTION: There is no high voltage adjustment on this chassis. The B+ power supply must be set to +125 volts (Full color bar input and normal picture level).

1. Connect a digital voltmeter to the second anode of the picture tube.
2. Turn on the TV. Set the Brightness and Contrast controls to minimum (zero beam current).
3. The high voltage should not exceed 27.5KV.
4. Adjust the Brightness and contrast controls to both extremes. Ensure that the high voltage does not exceed 27.5KV under any conditions.

4-3-4 FOCUS Adjustment

1. Input a black and white signal.
2. Adjust the tuning control for the clearest picture.
3. Adjust the FOCUS control for well defined scanning lines in the center area of the screen.

4-3-5 Cathode Voltage Adjustment (Screen Adjustment)

1. Connect CRT socket pin GK to an oscilloscope probe.
2. Input a gray scale pattern. (Use a pattern generator, PM5518)
3. Use the P mode key (on the remote control) for the STANDARD picture.
4. Adjust the Screen VR (on the FBT) so that the voltage on the oscilloscope becomes $130 \pm 2.5V$ (See Fig. 4-1).

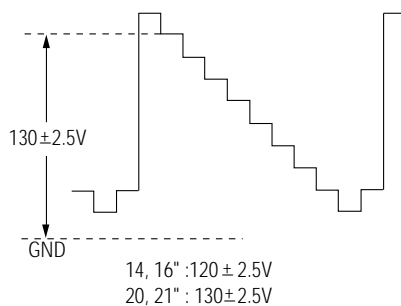


Fig. 4-1

4-3-6 Purity Adjustment

1. Warm up the receiver for at least 20 minutes.
2. Plug in the CRT deflection yoke and tighten the clamp screw.
3. Plug the convergence yoke into the CRT and set in as shown in Fig. 4-2.
4. Input a black and white signal.
5. Fully demagnetize the receiver by applying an external degaussing coil.
6. Turn the CONTRAST and BRIGHTNESS controls to maximum.
7. Loosen the clamp screw holding the yoke. Slide the yoke backward or forward to provide vertical green belt. (Fig. 4-3).
8. Tighten the convergence yoke.
9. Slowly move the deflection yoke forward, and adjust for the best overall green screen.
10. Temporarily tighten the deflection yoke.
11. Produce blue and red rasters by adjusting the low-light controls. Check for good purity in each field.
12. Tighten the deflection yoke.

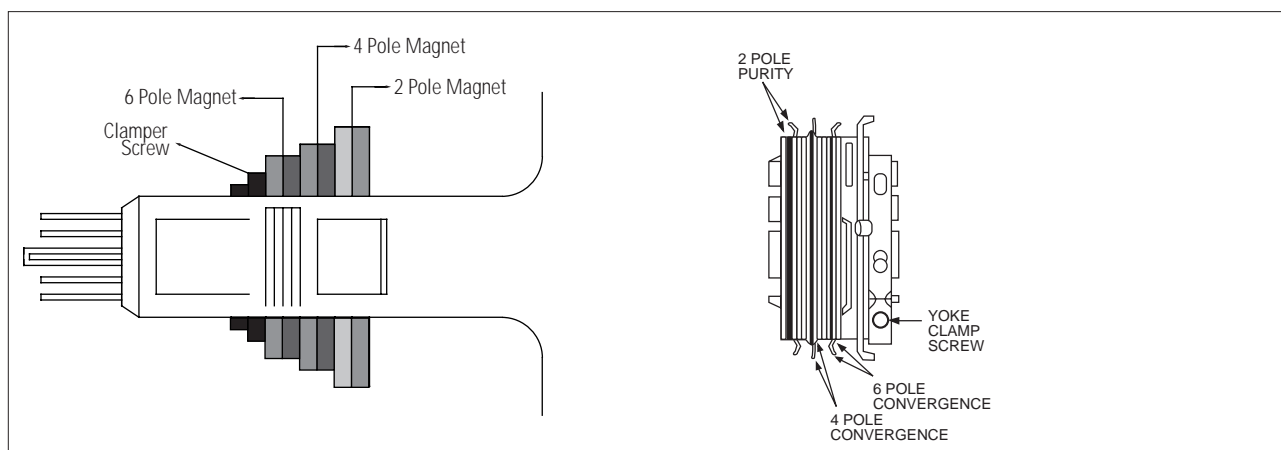


Fig. 4-2 Convergence Magnet Assembly

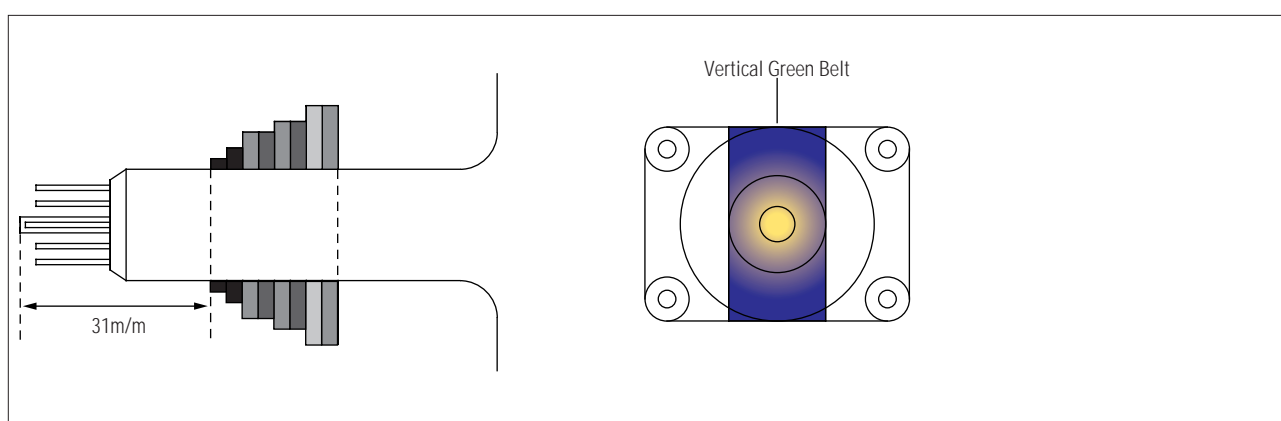


Fig. 4-3 Center Convergence Adjustment

4-3-7 White Balance Adjustment

(a) Set up

1. Warm up the TV for at least 30 minutes in the Aging Mode (OSD White). This mode is displayed by entering the following sequence:

SLEEP → FACTORY → FACTORY

2. Input a Toshiba pattern.

(b) Low-Light Adjustment

1. Set SBT to 1.3 ± 0.2 fL in the Factory Service Mode with using CA100. See Fig. 4-4 ②.
2. Adjust RG,BG so that the levels are suitable to each local area.

(c) High-Light Adjustment

1. Set SCT to 55 FL (20". 21"), 65 FL(14".16") in the Factory Service Mode with using CA100. See Fig. 4-4 ①.

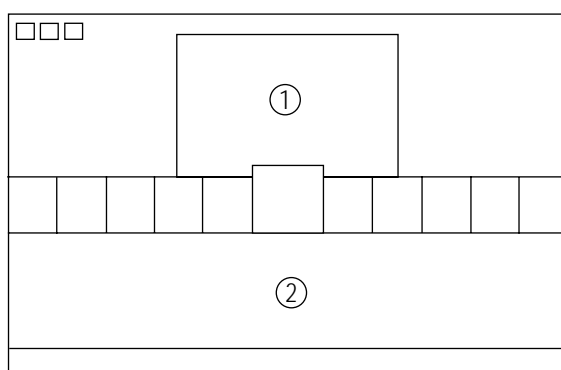


Fig. 4-4

4-3-8 Center Convergence Adjustment

1. Warm up the receiver for at least 20 minutes.
2. Adjust the two tabs of the 4 pole magnets to change the angle between them. Superimpose the red and blue vertical lines in the center area of the screen.
3. Adjust the Brightness and Contrast controls for a well defined picture.
4. Adjust the two-tab pairs of the 4 pole magnets, and change the angle between them. Superimpose the red and the blue vertical lines in the center area of the screen.
5. Turn the both tabs at the same time, keeping the angle constant, and superimpose the red and blue horizontal line in the center of the screen.
6. Adjust the two-tab pairs of the 6-pole magnets to superimpose the red and blue line onto the green. (Changing the angle affects the vertical lines, and rotating both magnets affects the horizontal lines.)
7. Repeat adjustments 2~6, if necessary.
8. Since the 4-pole magnets and 6-pole magnets interact, the dot movement is complex (Fig. 4-5).

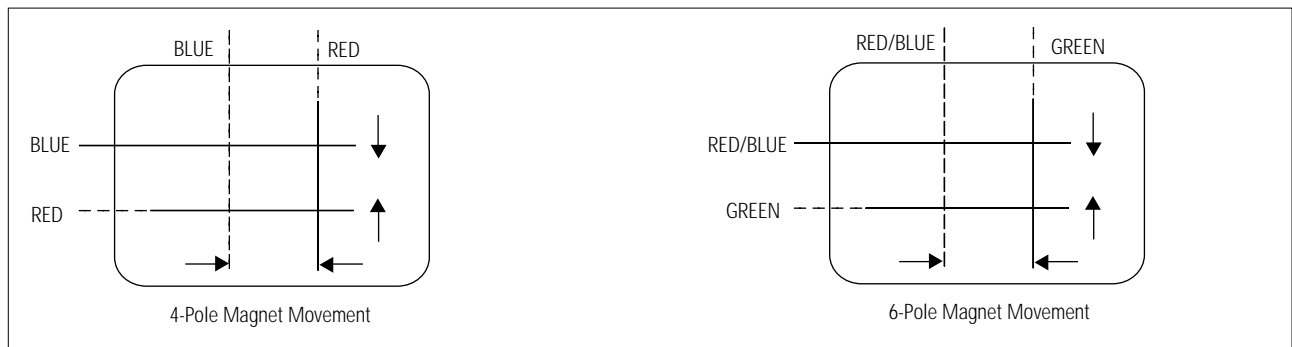


Fig. 4-5 Center Convergence Adjustment

4-3-9 VCO Adjustment

Set the vco data to 80 (Factory Mode).

NOTE : For SZM-173EW and SPM-175E (Western Europe remote control), set the VCO data to 1.

4-3-10 RF AGC Adjustment

Set the AGC data to 14 (Factory Mode).

4-3-11 Sub-Color Adjustment

Set SCR data to 10 (Factory Mode).

4-3-12 Geometry Adjustment

SC → PVA → PVS → PSL → PHS

1. Input a lion head pattern (in the PAL channel).
2. Set the SC (S-Correction) as follows : 12 (21"), 10 (20"), 0 (14", 16") and PVA 40 so that the lion head circle becomes oval.
3. Adjust with PVS (Vertical shift) so that the top margin of the picture is 4.




Fig. 4-7

4. Adjust with PSL (Vertical-Slope) so that the bottom margin of the picture is 4.




Fig. 4-8

5. Adjust with PHS (Horizontal Shift) so that the lion-head pattern and CRT centers are aligned.





Fig. 4-9

6. Adjust PHS (using the width coil) so that the left and right margins of the picture are 5.


MEMO

5. Troubleshooting


5-1 No Video (Raster On, No Sound)

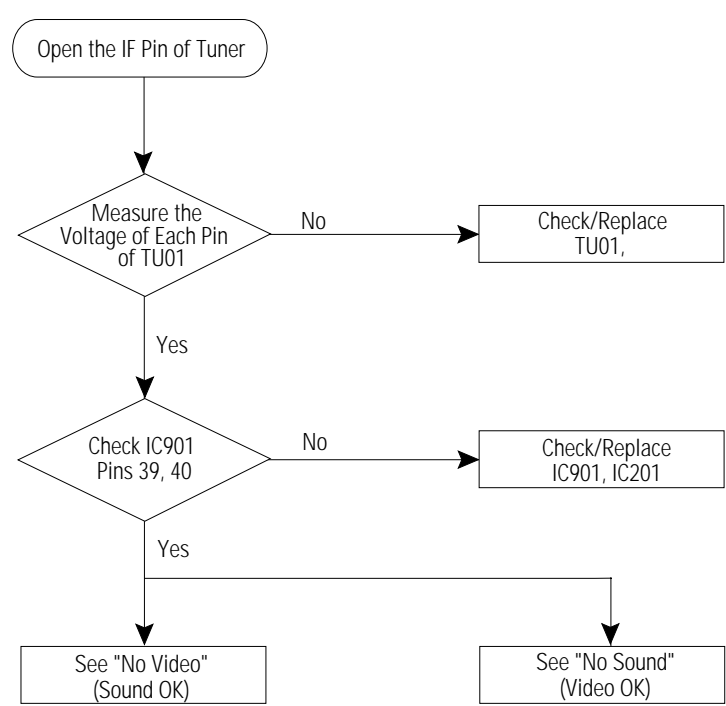


5-2 No Power

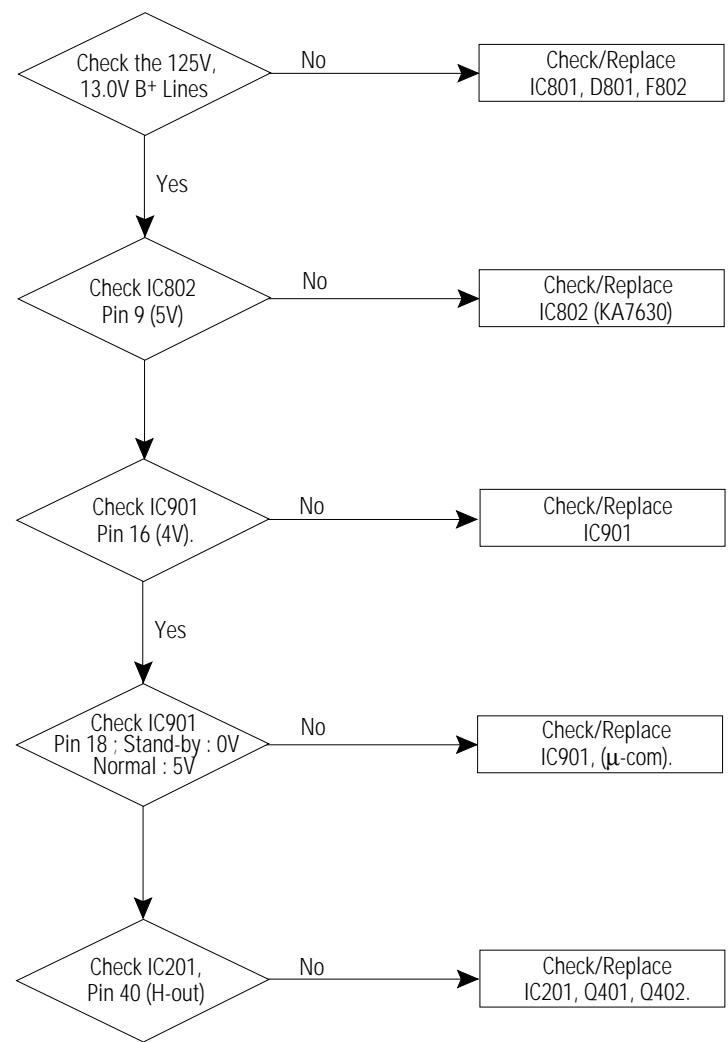


5-3 No Video (Sound OK)

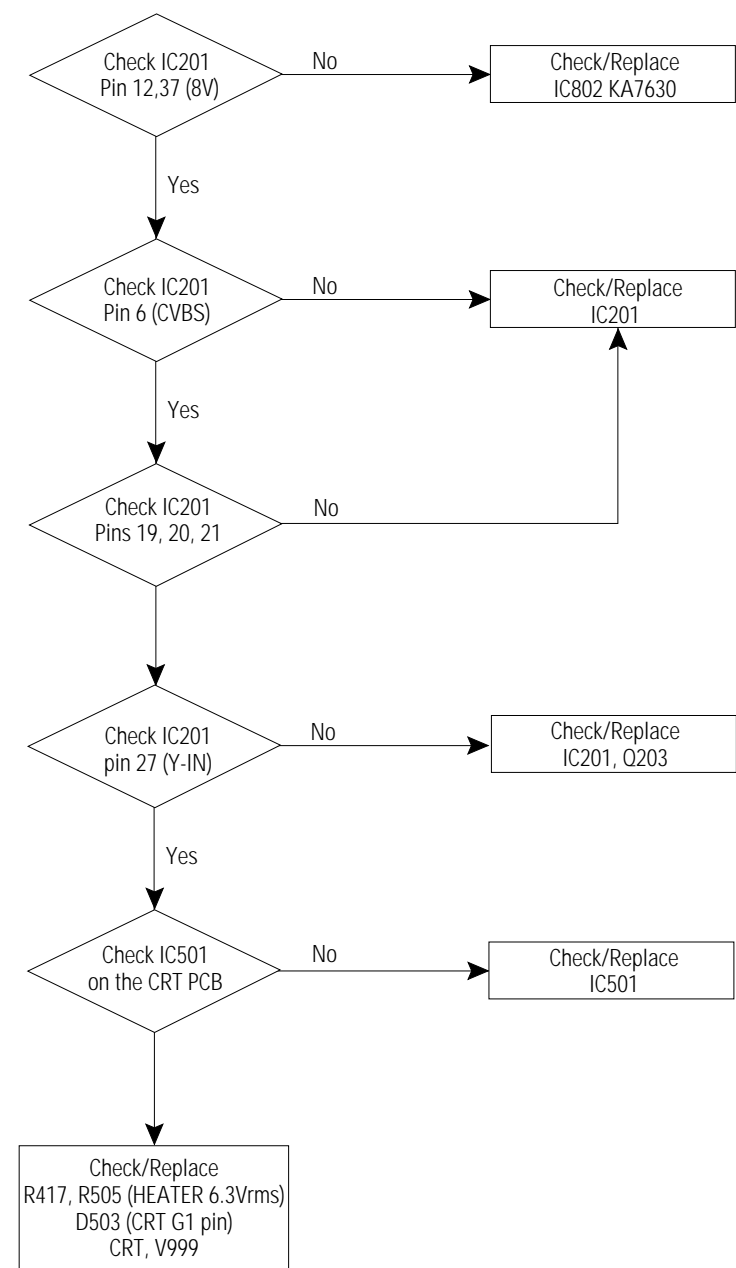

5-4 No Sound (Video OK)

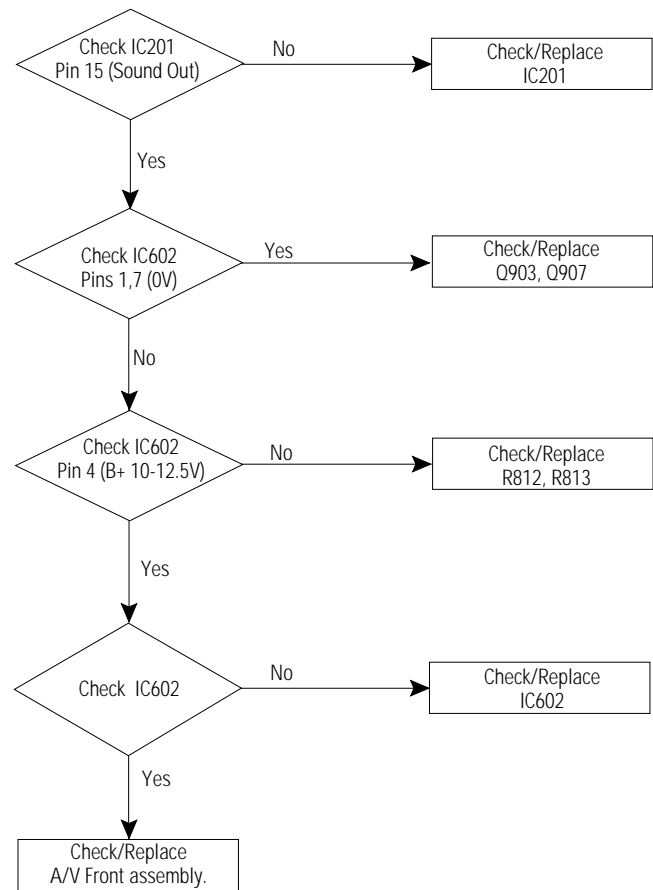


5-5 No TTX

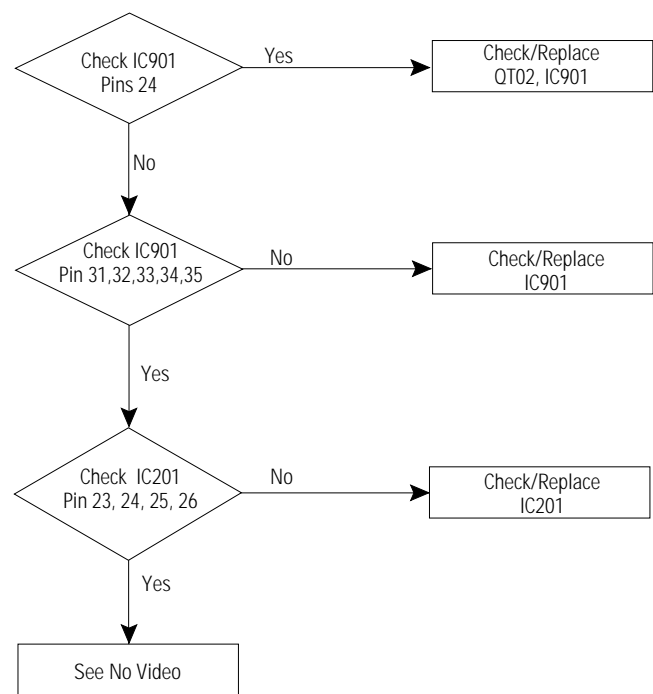


6. Exploded View & Parts List

6-1 CK14H1VR5S/NWT

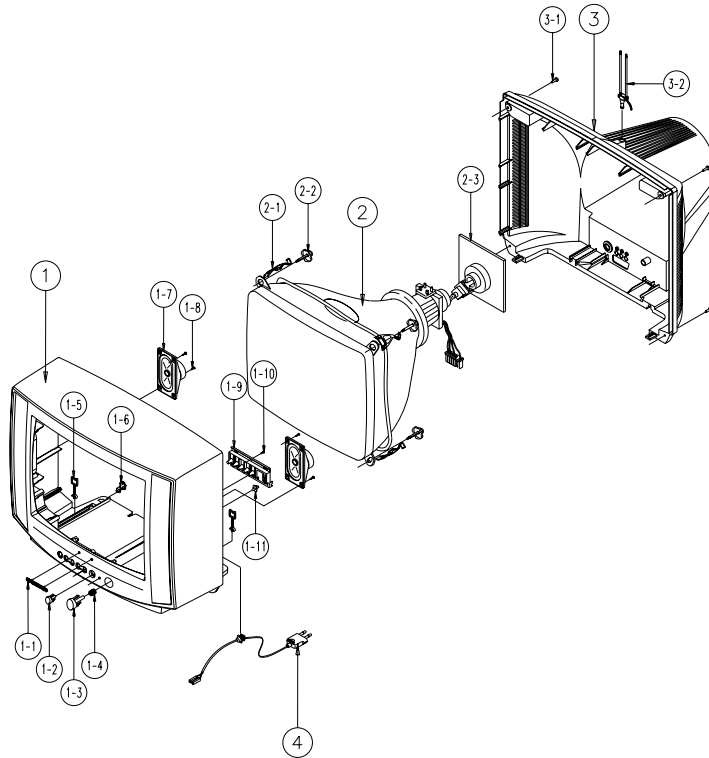

No	Code No	Description	Specification	Q'ty	Remark
1	AA91-00039B	ASSY-CABINET,FRONT	DP,331H,BK708P MLN,HB,BLK	1	
	AA64-31232K	CABINET-FRONT	-,331H,BK708P MLN,HIPS,HB,BLK,-,-	1	
1-1	AA64-70127F	BADGE-BRAND	AL,SAMSUNG,SILVER,L40,R800,NEW	1	
1-2	AA64-40495A	WINDOW-REMOCON	-,331,501H,-,PC,-,VIOLET,-	1	
1-3	AA64-10768D	KNOB-POWER	-,33,501H,NO-SILK,ABS,HB,BLK	1	
1-4	AA61-60003J	SPRING-CS	-,SUS304,0.5,OD6,H12,N7,-,-,-	1	
1-5	AA65-30105A	CLAMP-WIRE	NYLON 66,V2,NTR,15MM,ALL MODE	1	
1-6	AA61-40113A	STOPPER-PCB	501H,HIPS,NTR,HB,-,-	1	
1-7	3001-000191	SPEAKER	3W,8ohm,90dB,180Hz	2	
1-8	6003-001026	SCREW-TAPTITE	RH,+,B,M4,L15,ZPC(BLK),SWRCH18	4	
1-9	AA64-10767A	KNOB-CONTROL	-,,-,ABS,HB,BLK	1	
1-10	6003-001026	SCREW-TAPTITE	RH,+,B,M4,L15,ZPC(BLK),SWRCH18	1	
1-11	AA64-40496A	INDICATOR-LED	-,,-,ACRYL,-,-,-	1	
2	AA03-10001D	CRT-COLOR	-,A34KQV42X,+380MG,14,90DEG,5	1	
2-1	AA65-30106A	CLAMP-D,COIL	NYLON 66,V2,NTR,-,14 INCH,-	4	
2-2	AA60-10050R	SCREW-ASSY	WC,HH,+,M5,L31.5,SWRCH18A,ZPC(4	
2-3	3704-001089	SOCKET-CRT	7P,22.5PI,12PI,SN,-	1	
3	AA64-00125A	CABINET-BACK	DP,331H,-,V2,-,BLK,-,-	1	
3-1	6003-001026	SCREW-TAPTITE	RH,+,B,M4,L15,ZPC(BLK),SWRCH18	4	
3-2	AA42-10001V	ANT-ROD	-,3S,620mm,BRN,UL/CSA	1	
4	AA39-10001G	POWER-CORD	-,KKP-419C,KLCE-2F,2.286m,HOUS	1	

6-2 CK2166VR5S/AWT

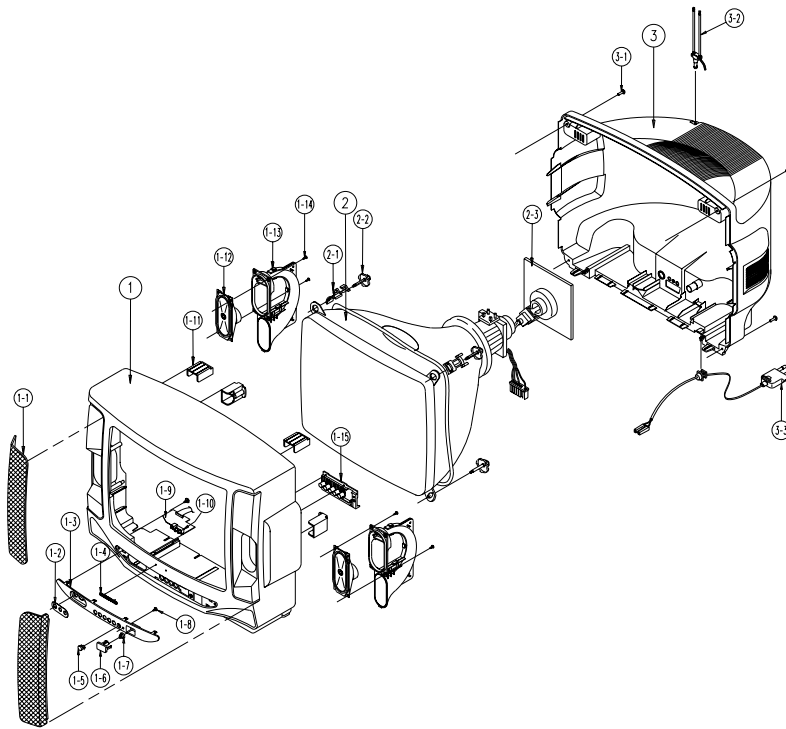

No	Code No	Description	Specification	Q'ty	Remark
1	AA91-00063K	ASSY-CABINET,FRONT	-,5366,BK708 AWT TVI ML,HB,BLK	1	
	AA64-00194G	CABINET-FRONT	-,5366,BK708 AWT TVI ML,HIPS,H	1	
1-1	AA63-50275A	GRILLE-WOOFER	-,5366,PA110,SECC-1,T0.5,-,-	2	
1-2	AA64-60284D	INLAY-AV	50.5366,KSP213 WHT,PS,T0.5,BLK	1	
1-3	AA63-00050G	COVER-CONTROL,A	-,5366,KSP213 MW ,HIPS,HB,BLK,	1	
1-4	AA64-70123B	BADGE-BRAND	AL,R2000,SILVER,L=50,SAMSUNG,-	1	
1-5	AA64-40360B	WINDOW-REMOCON	-,66,-,PC ,VO,VIOLET,-	1	
1-6	AA64-10581F	KNOB-POWER	-,5366,-,ABS,HB,M/B	1	
1-7	AA61-60003T	SPRING-CS	-,SUS304,0.5,OD7,H13.5,N5,-,-,	1	
1-8	AA64-40184A	INDICATOR-LED	-,66,-,ACRYL,-,CLEAR,-	1	
1-9	AA95-90023M	ASSY-PCB,A/V FRONT	-,5066,5366,SCT13B,PAL,-,-	1	
1-10	3722-000506	JACK-RCA	2P,3.6mm,-,AG	1	
1-11	AA61-40015A	BOSS-CABINET	-,HIPS,HB,NTR,-,-	4	
1-12	AA91-60302A	ASSY-HOLDER,SPK	-,8ohm6W,R700L350,4P/RBYB,5066	1	
1-13		ASSY-HOLDER,SPK OPTION			
1-14	6002-000522	SCREW-TAPPING	TH,+,2,M4,L15,ZPC(BLK),SWRCH18	4	
1-15	AA64-10559B	KNOB-CONTROL	-,66,-,ABS,HB,M/B	1	
2	AA03-10027Q	CRT-COLOR	-,A51KQJ63X02(H),+380mG,21,90	1	
2-1	AA65-30107A	CLAMP-D,COIL	NYLON 66,V2,NTR,-,20-22 INCH,-	4	
2-2	AA60-10050R	SCREW-ASSY	WC,HH,+,M5,L31.5,SWRCH18A,ZPC(4	
2-3	3704-001090	SOCKET-CRT	9P,15.24PI,26.5PI,SN,-	1	
3	AA64-30680B	CABINET-BACK	-,5066,-,HIPS,HB,BLK,-,-	1	
3-1	6002-000514	SCREW-TAPPING	RH,+,2,M4,L15,ZPC(BLK),SWRCH18	6	
3-2	AA42-10001V	ANT-ROD	-,3S,620mm,BRN,UL/CSA	1	
3-3	AA39-10001G	POWER-CORD	-,KKP-419C,KLCE-2F,2.286m,HOUS	1	

7. Electric Parts List

7-1 CK14H1VR5S/NWT (CK2166VR5S AND CK14H1VR5S Dissimilar Parts)

Loc. No.	Code No.	Description ; Specification	Remark	Loc. No.	Code No.	Description ; Specification	Remark
ASSY-PCB,MAIN(OPT) BUYER : SRSC				ASSY-CRT			
*	AA94-00703A	ASSY-PCB,MAIN(OPT);CK14H1VR5S/NWT,S15A,N-RUSSIA,		AA03-10001D CRT-COLOR;- ,A34KQV42X,+380MG,14,90DEG,5 AA27-00001A MAGNET-CONVERGENCE;- ,JH225-06A,22.5MM AA27-50004X DEFLECTION-YOKE;- ,DSE-1422FL(G),14/A34K AA63-60028A SPACER-DY;NEOPRENE,-,BLK,V0 W12,-,-			
C307	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5,5		ASSY-SPEAKER			
C409	2301-001219	C-FILM,MPE-PPF;3.9nF,5%,1.6KV,TP,29x8.5x15,20		3001-000191 SPEAKER;3W,8ohm,90dB,180Hz AA39-20505N LEAD CONNECTOR-ASSY;- ,YSH025-04,REC,4P,350,550mm,1			
C410	2201-000467	C-CERAMIC,DISC;330pF,10%,2KV,Y5P,TP,8x6,7.5		ASSY-POWER,CORD			
C416	2306-001004	C-FILM,MPPF;300nF,5%,400V,TP,26x14x21mm,20		ASSY-ACCESSORY			
CN501	AA39-20109A	LEAD-CONNECTOR,ASSY;- ,YBNH025-08,S,8P,400,1007#26		AA61-20284A HOLDER;- ,P-CORD,PP,VO,BLK,KE-002			
CN603	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGHT,SN		AA68-11289B MANUAL-USERS;S15A,N-RUSSIAN,1 COLOR,B5,W/P 100(G			
CN802	AA27-20003U	COIL-DEGAUSSING;- ,14',200HM,85T,890MM,D					
△ IC601	1201-001147	IC-AUDIO AMP;7056B,SIP,9P,-,SINGLE,41.5dB,P					
J181	2001-000539	R-CARBON;24KOHM,5%,1/8W,AA,TP,1.8X3.2MM					
JS701	3722-000497	JACK-PIN;4P,3.4mm,SN,BLK,-					
L401	AA27-30003R	COIL-LINERITY;- ,220uH,YL10x10,0.35mm,23x13mm					
R301	2004-001983	R-METAL(S);2.49Kohm,1%,1/2W,AA,TP,2.4x6.4					
R302	2003-002010	R-METAL OXIDE(S);680ohm,5%,1W,AF,TP,3.9x10mm					
R305	2004-004087	R-METAL(S);1.5ohm,1%,1/2W,AA,TP,2.5x6.5mm					
R307	2003-000649	R-METAL OXIDE(S);330ohm,5%,1W,AF,TP,3.3x9mm					
R405	2001-000117	R-CARBON(S);680HM,5%,1/2W,AA,TP,2.4X6.4MM					
R417	2008-000256	R-FUSIBLE(S);1.5ohm,5%,2W,AA,TP,3.9x10mm					
R501M	2002-001008	R-COMPOSITION;1.8Kohm,5%,1/2W,AA,TP,3.7x9mm					
R502M	2002-001008	R-COMPOSITION;1.8Kohm,5%,1/2W,AA,TP,3.7x9mm					
R505	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm					
R610	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM					
R815	2008-001002	R-FUSIBLE(S);0.18ohm,5%,2W,AA,TP,3.9x10mm					
△ T444	AA26-00004A	TRANS-FLYBACK;- ,FSA38026S,14INCH,125V					
△ V999	3704-001089	SOCKET-CRT;7P,22.5PI,12PI,SN,-					

7-2 CK2166VR5S/AWT Parts List

Loc. No.	Code No.	Description ; Specification	Remark	Loc. No.	Code No.	Description ; Specification	Remark
ASSY-PCB,MAIN(OPT) BUYER : SRSC							
*	AA94-00844A	ASSY-PCB,MAIN(OPT);CK2166VR5S/AWT,S15A,KAZAKHST					
C101	2401-000030	C-AL;22uF,20%,25V,GP,TP,5x11,5		C215	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
C102	2401-001082	C-AL;330nF,20%,50V,GP,TP,5x11,5		C216	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
C103	2401-001363	C-AL;470uF,20%,16V,GP,TP,10x12.5,5		C217	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
C201	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0mm,		C219	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
C202	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5		C221	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP,1.9x3.5,-	
C203	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5		C222	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
C204	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5		C224	2202-000295	C-CERAMIC,MLC-AXIAL;68pF,5%,50V,SL,TP,3.5x19,-	
C205	2305-000411	C-FILM,MPEF;470nF,5%,50V,TP,7.3x4.8x5.5mm,		C226	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5m	
C206	2305-000411	C-FILM,MPEF;470nF,5%,50V,TP,7.3x4.8x5.5mm,		C228	2201-000247	C-CERAMIC,DISC;15pF,5%,50V,CH,TP,5x3,5	
C207	2305-000196	C-FILM,MPEF;150nF,5%,63V,TP,-,5mm		C230	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
C208	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5		C231	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
C209	2202-000849	C-CERAMIC,MLC-AXIAL;18pF,5%,50V,CH,TP,3.5x1.9,-		C232	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
C210	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm		C238	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
C211	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0mm,		C239	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
C212	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3.5X1.9MM,-		C240	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0mm,	
C213	2201-000273	C-CERAMIC,DISC;18pF,5%,50V,CH,TP,5x3mm,5		C247	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V,TP,2.2x3.	
C214	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5mm		C248	2309-000138	C-FILM,PE-PPF;100nF,5%,50V,TP,20x16x8.5,7.5mm	
				C249	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
				C250	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5m	
				C251	2301-000204	C-FILM,PEF;2.7nF,5%,50V,TP,7.4x3.9x13mm,5	
				C252	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
				C253	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0mm,	

Electric Parts List


Loc. No.	Code No.	Description ; Specification	Remark	Loc. No.	Code No.	Description ; Specification	Remark
C254	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0mm,		C923	2202-002037	C-CERAMIC,MLC-AXIAL:100nF,80-20%,50V,Y5V,TP,2.2x3.	
C255	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0mm,		C924	2202-002037	C-CERAMIC,MLC-AXIAL:100nF,80-20%,50V,Y5V,TP,2.2x3.	
C301	2202-000253	C-CERAMIC,MLC-AXIAL:4.7nF,20%,16V,Y5R,TP,1.9x3.5,7		C926	2202-000796	C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP,3.5X1.9MM,-	
C302	2202-000253	C-CERAMIC,MLC-AXIAL:4.7nF,20%,16V,Y5R,TP,1.9x3.5,7		C927	2201-000573	C-CERAMIC,DISC:47pF,5%,50V,CH,TP,6.5x3.0,5	
C303	2401-003028	C-AL:100uF,20%,25V,WT,TP,6.3x11,5		CA01	2401-001989	C-AL:4.7uF,20%,50V,BP,TP,5x11,5	
C304	2401-000903	C-AL:22uF,20%,160V,WT,TP,10x20mm,5mm		CN501	AA39-20109B	LEAD-CONNECTOR,ASSY:-,YBNH025-08,S,8P,500,1007#26	
C305	2305-000178	C-FILM,MPEF;10nF,5%,100V,TP,-,5mm		CN602	3711-002643	CONNECTOR-HEADER:BOX,4P,1R,2.5mm,STRAIGHT,SN	
C306	2305-000285	C-FILM,MPEF;220NF,5%,100V,TP,10.5X5.5X15MM		CN701	3711-000628	CONNECTOR-HEADER:-,11P,1R,2.5mm,STRAIGHT,-	
C307	2305-000708	C-FILM,MPEF;150nF,5%,100V,TP,16.5x10.3x5.7		CN802	AA27-20003Z	COIL-DEGAUSSING:-,21',20.5OHM,35T,L2380,E	
C308	2305-000450	C-FILM,MPEF;56nF,5%,100V,TP,-,5mm		CW901	2503-000156	C-NETWORK:100pF,4.20%,50V	
C401	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm		D201	0401-000005	DIODE-SWITCHING:1N4148,75V,200MA,DO-35,TP	
C402	2201-000599	C-CERAMIC,DISC:560pF,10%,500V,Y5P,TP,7x4,5		D202	0401-000005	DIODE-SWITCHING:1N4148,75V,200MA,DO-35,TP	
C403	2201-000556	C-CERAMIC,DISC:470pF,10%,500V,Y5P,TP,7x4,5		D205	0401-000005	DIODE-SWITCHING:1N4148,75V,200MA,DO-35,TP	
C404	2401-001998	C-AL:1000uF,20%,25V,GP,TP,10x20,5mm		D208	2001-000633	R-CARBON:30KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
C408	2401-002619	C-AL:47uF,20%,25V,GP,TP,5x11,5		D209	0401-000005	DIODE-SWITCHING:1N4148,75V,200MA,DO-35,TP	
C409	2306-000327	C-FILM,MPPF;6.3nF,3%,1.6KV,TP,28.5x18x10,2		D210	0401-000005	DIODE-SWITCHING:1N4148,75V,200MA,DO-35,TP	
C410	2201-000983	C-CERAMIC,DISC:1nF,10%,2KV,Y5P,TP,13x6,7.5mm		D211	0401-000005	DIODE-SWITCHING:1N4148,75V,200MA,DO-35,TP	
C411	2401-000927	C-AL:22uF,20%,250V,GP,TP,13x20,5		D213	0401-000005	DIODE-SWITCHING:1N4148,75V,200MA,DO-35,TP	
C413	2305-000382	C-FILM,MPEF;4.7nF,5%,400V,TP,-,5mm		D401	0402-000132	DIODE-RECTIFIER:1N4004,400V,1A,DO-41,TP	
C414	2301-001065	C-FILM,MPPF;47nF,5%,630V,TP,19x15.5x7,7.5		D402	0402-000132	DIODE-RECTIFIER:1N4004,400V,1A,DO-41,TP	
C415	2401-000560	C-AL:1uF,20%,160V,GP,TP,6.3x11,5		D403	0402-001105	DIODE-RECTIFIER:ERB43-04SV1,400V,1.0A,-,TP	
C416	2306-000204	C-FILM,MPPF;430nF,5%,400V,TP,26x20.5x12.5,		D404	0402-000534	DIODE-RECTIFIER:RG10V,400V,1.2A,DO-201,TP	
C417	2201-000556	C-CERAMIC,DISC:470pF,10%,500V,Y5P,TP,7x4,5		D405	0402-001105	DIODE-RECTIFIER:ERB43-04SV1,400V,1.0A,-,TP	
C418	2401-000384	C-AL:10uF,20%,100V,GP,TP,6.3x11,5mm		D406	0402-001105	DIODE-RECTIFIER:ERB43-04SV1,400V,1.0A,-,TP	
C419	2201-000984	C-CERAMIC,DISC:680pF,10%,2KV,Y5P,TP,11x6,7.5mm		D501	0402-000216	DIODE-RECTIFIER:ERC24-06,600V,1.0A,DO-204	
C502	2301-000213	C-FILM,PEF;220nF,5%,250V,TP,21.5x11,7.5		D502	0402-001105	DIODE-RECTIFIER:ERB43-04SV1,400V,1.0A,-,TP	
C503	2201-002063	C-CERAMIC,DISC:10nF,+80-20%,3KV,Y5V,TP,16x5,7		D503	0402-001105	DIODE-RECTIFIER:ERB43-04SV1,400V,1.0A,-,TP	
C504	2401-001232	C-AL:4.7uF,20%,250V,GP,TP,10x12,5,5		D504	0402-001105	DIODE-RECTIFIER:ERB43-04SV1,400V,1.0A,-,TP	
C506	2401-000430	C-AL:10uF,20%,250V,GP,TP,10x16mm,5mm		D701	0401-000005	DIODE-SWITCHING:1N4148,75V,200MA,DO-35,TP	
C601	2202-000210	C-CERAMIC,MLC-AXIAL:270pF,10%,50V,Y5P,TP,1.9x3.5,7		D800	1405-000187	VARIATOR:750V,1250A,12.5x7mm,TP	
C602	2401-000030	C-AL:22uF,20%,25V,GP,TP,5x11,5		D801	0402-000102	DIODE-BRIDGE:D2SB60,600V,1.5A,-	
C603	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm		D802	0402-000540	DIODE-RECTIFIER:RU20A,600V,1.5A,-,TP	
C604	2401-001323	C-AL:470nF,20%,50V,BP,TP,5x11,5mm		D803	0402-000430	DIODE-RECTIFIER:FML-G025,200V,3.0A,TO-220F,BK	
C610	2401-001998	C-AL:1000uF,20%,25V,GP,TP,10x20,5mm		D804	0402-000213	DIODE-RECTIFIER:ERB12-06,600V,1.0A,DO-41,TP	
C611	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm		D809	0401-000005	DIODE-SWITCHING:1N4148,75V,200MA,DO-35,TP	
C612	2401-001323	C-AL:470nF,20%,50V,BP,TP,5x11,5mm		D810	0402-000216	DIODE-RECTIFIER:ERC24-06,600V,1.0A,DO-204	
C613	2202-000796	C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP,3.5X1.9MM,-		D901	0401-000005	DIODE-SWITCHING:1N4148,75V,200MA,DO-35,TP	
C614	2202-000210	C-CERAMIC,MLC-AXIAL:270pF,10%,50V,Y5P,TP,1.9x3.5,7		D903	0403-000296	DIODE-ZENER:MTZ5.6B,5.6V,5.45-5.73V,500mW,	
C702	2202-000263	C-CERAMIC,MLC-AXIAL:470pF,10%,50V,Y5P,TP,3.5x19,-		D905	0401-000005	DIODE-SWITCHING:1N4148,75V,200MA,DO-35,TP	
C704	2202-000121	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP,1.9x3.5,-		D906	0401-000005	DIODE-SWITCHING:1N4148,75V,200MA,DO-35,TP	
C705	2401-001989	C-AL:4.7uF,20%,50V,BP,TP,5x11,5		D907	0401-000005	DIODE-SWITCHING:1N4148,75V,200MA,DO-35,TP	
C706	2401-001989	C-AL:4.7uF,20%,50V,BP,TP,5x11,5		D908	0401-000005	DIODE-SWITCHING:1N4148,75V,200MA,DO-35,TP	
C800	2306-000321	C-FILM,MPPF;470NF,5%,275V,TP,-,22.5		D910	2001-000734	R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
C801	2401-002213	C-AL:150uF,+30-10%,450V,GP,BK,25x35		D912	0401-000005	DIODE-SWITCHING:1N4148,75V,200MA,DO-35,TP	
C802	2401-001192	C-AL:33uF,20%,50V,GP,TP,6.3x11,5		DA01	0401-000005	DIODE-SWITCHING:1N4148,75V,200MA,DO-35,TP	
C803	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5mm		DZ201	0403-000355	DIODE-ZENER:UZ5.1BSB,5.1V,4.97-5.18V,500mW	
C804	2301-000310	C-FILM,PEF;68nF,5%,50V,TP,8.0X8.5X4.0X5,5		DZ202	0403-000551	DIODE-ZENER:MTZ3.9B,3.9V,3.89-4.16V,500mW,	
C805	2303-000163	C-FILM,PPF;2.2nF,5%,800V,TP,15x13x8.5,7.5		DZ203	0403-000563	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500mW,	
C806	2201-000446	C-CERAMIC,DISC:3.3nF,20%,400V,Y5U,TP,18x8,10mm		DZ204	2001-000812	R-CARBON:5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
C807	2201-000991	C-CERAMIC,DISC:560pF,10%,2KV,Y5P,TP,13x7,7.5		DZ205	0403-000563	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500mW,	
C808	2401-000262	C-AL:100uF,20%,160V,HR,TP,16x25,7.5		DZ208	0403-000563	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500mW,	
C809	2401-002290	C-AL:47uF,20%,160V,GP,TP,13x20,5		DZ301	0403-000660	DIODE-ZENER:MTZ22A,22V,20.15-21.2V,500mW,TP	
C810	2201-000991	C-CERAMIC,DISC:560pF,10%,2KV,Y5P,TP,13x7,7.5		DZ302	0403-001039	DIODE-ZENER:MA2560,56V,52-60V,1W,DO-41,D	
C811	2401-003141	C-AL:2200uF,20%,25V,WT,TP,13x25,5mm		DZ401	0403-000296	DIODE-ZENER:MTZ5.6B,5.6V,5.45-5.73V,500mW,	
C814	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm		DZ501	0403-000563	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500mW,	
C815	2401-002594	C-AL:220uF,20%,16V,GP,TP,8x11,5,5		DZ502	0403-000563	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500mW,	
C816	2401-000603	C-AL:1uF,20%,50V,GP,TP,5x11,5		DZ503	0403-000563	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500mW,	
C818	2401-002144	C-AL:47uF,20%,16V,GP,TP,5x11,5		DZ504	0403-000563	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500mW,	
C819	2401-001840	C-AL:100uF,20%,16V,GP,TP,6.3x11,5		DZ701	0403-000563	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500mW,	
C901	2401-001840	C-AL:100uF,20%,16V,GP,TP,6.3x11,5		DZ702	0403-000563	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500mW,	
C902	2202-000796	C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP,3.5X1.9MM,-		DZ703	0403-000563	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500mW,	
C904	2202-000796	C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP,3.5X1.9MM,-		DZ704	0403-000563	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500mW,	
C905	2401-001333	C-AL:470nF,20%,50V,GP,TP,5x11,5		DZ705	0403-000563	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500mW,	
C907	2201-000119	C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP,8x3.5		DZ802	0403-000297	DIODE-ZENER:MTZ6.2B,6.2V,5.96-6.27V,500mW,	
C908	2201-000193	C-CERAMIC,DISC:10pF,0.3pF,50V,CH,TP,5x3,5		DZ803	1203-001217	IC-POS.ADJ.UST REG.:431,TO-92,3P,4.58MIL,PLASTIC,2	
C909	2201-000193	C-CERAMIC,DISC:10pF,0.3pF,50V,CH,TP,5x3,5		DZ804	2001-001170	R-CARBON(S):6.8OHM,5%,1/2W,AA,TP,2.4X6.4MM	
C910	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0mm,		DZ808	0403-000300	DIODE-ZENER:MTZ8.2B,8.2V,7.78-8.19V,500mW,	
C911	2401-000235	C-AL:10uF,20%,16V,GP,TP,5x11mm,5mm		DZ809	0403-000296	DIODE-ZENER:MTZ5.6B,5.6V,5.45-5.73V,500mW,	
C912	2201-000234	C-CERAMIC,DISC:150pF,5%,50V,CH,TP,9.5x3,5		DZ901	0403-000563	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500mW,	
C913	2301-000108	C-FILM,PEF;1.5nF,5%,50V,TP,6.5x3.0x5.5mm,		DZ902	2202-000127	C-CERAMIC,MLC-AXIAL:10nF,+80-20%,25V,Y5V,TP,-,7.5	
C914	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0mm,		DZ903	1203-000451	IC-VOLTAGE REGULATOR:33,TO-92,3P,-,PLASTIC,31/35V,	
C915	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0mm,		DZ905	0403-000296	DIODE-ZENER:MTZ5.6B,5.6V,5.45-5.73V,500mW,	
C916	2301-000247	C-FILM,PEF;33nF,5%,50V,TP,8.1x4.5x13mm,5mm		DZ907	0403-000296	DIODE-ZENER:MTZ5.6B,5.6V,5.45-5.73V,500mW,	
C917	2202-002037	C-CERAMIC,MLC-AXIAL:100nF,80-20%,50V,Y5V,TP,2.2x3.		DZ909	0403-000551	DIODE-ZENER:MTZ3.9B,3.9V,3.89-4.16V,500mW,	
C919	2202-000796	C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP,3.5X1.9MM,-		F801	3601-000261	FUSE-FERRULE:250V,3.15A,TL,GLASS,5.2x20mm	
C920	2401-000480	C-AL:10uF,20%,50V,GP,TP,5x11,5		F801A	3602-000114	FUSE-HOLDER:-,30mohm	
C922	2201-000573	C-CERAMIC,DISC:47pF,5%,50V,CH,TP,6.5x3.0,5		F801B	3602-000114	FUSE-HOLDER:-,30mohm	

Loc. No.	Code No.	Description ; Specification	Remark	Loc. No.	Code No.	Description ; Specification	Remark
△ F802	3601-001086	FUSE-FERRULE;125V,5A,FA,GLASS,2.4x7.5mm		R227	2004-001234	R-METAL:75Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
△ IC201	1204-001440	IC-VIDEO SYSTEM;TDA8842,DIP,56P,300MIL,PLASTIC		R229	2001-000890	R-CARBON:6.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
△ IC301	1204-000441	IC-IF CIRCUIT;TDA8356,SIP,9P,-,PLASTIC,40V,-		R230	2001-000793	R-CARBON:47OHM,5%,1/8W,AA,TP,1.8X3.2MM	
△ IC501	1201-001159	IC-VIDEO AMP;6107,ZIP,9P,300MIL,SINGLE,-,PL		R231	2001-000563	R-CARBON:27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
△ IC602	1201-000537	IC-AUDIO AMP;7057,ZIP,13P,-,DUAL,40dB,PLAST		R232	2001-000356	R-CARBON:150KOHM,5%,1/8W,AA,TP,1.8X3.2M	
△ IC801	1203-001494	IC-PWM CONTROLLER;3S0680RF,TO3PF-5L,5,210,PLASTI		R234	2001-000281	R-CARBON:100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
△ IC802	1203-001531	IC-POS.FIXED REG.;7630,SIP,10P,-,PLASTIC,5.1/8V,		R236	2003-000634	R-METAL OXIDE(S):3.9Kohm,5%,1W,AA,TP,3.9x10mm	
△ IC901	AA13-30021J	IC-MCU;- ,SZM-173ER3(R3943),8BIT,ST,SD		R237	2001-000793	R-CARBON:47OHM,5%,1/8W,AA,TP,1.8X3.2MM	
△ IC902	1103-001105	IC-EEPROM;24C040,4Kx1BIT,DIP,8P,300MIL,1		R240	2001-000832	R-CARBON:510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
J185	2701-000114	INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm		R241	2001-000734	R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
JS701	3722-000183	JACK-SCART;21P,4mm,SN,BLK,NO		R242	2001-000734	R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
L102	2701-000212	INDUCTOR-AXIAL:68uH,10%,2.8x7mm		R251	2001-000429	R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
L103	2701-000114	INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm		R252	2004-001914	R-METAL:39Kohm,2%,1/8W,AA,TP,1.8x3.5mm	
L202	2701-000168	INDUCTOR-AXIAL:3.3uH,5%,2.5x3.4mm		R262	2001-000429	R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
L206	2701-000114	INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm		R301	2004-000869	R-METAL:3Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
L301	2701-000114	INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm		R302	2008-001033	R-FUSIBLE(S):10ohm,5%,2W,AF,TP,3.9x10mm	
L302	2701-000114	INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm		R303	2001-000273	R-CARBON:100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
L304	2701-000159	INDUCTOR-AXIAL:22uH,10%,4.2x9.8mm		R305	2004-001370	R-METAL(S):1.3ohm,1%,1/2W,AA,TP,2.4x6.4mm	
L305	2701-000116	INDUCTOR-AXIAL:10uH,10%,4.2x9.8mm		R306	2008-000254	R-FUSIBLE(S):0.68ohm,5%,2W,AF,TP,3.9x10mm	
L306	2701-000115	INDUCTOR-AXIAL:10uH,10%,2.8x7mm		R307	2003-001026	R-METAL OXIDE(S):180ohm,5%,2W,AF,TP,3.9x10mm	
L401	AA27-30001B	COIL-LINEARITY;- ,195uH,QIC1010,PIO.4.4.5x21.5		R402	2003-000664	R-METAL OXIDE(S):33ohm,5%,2W,AF,TP,4x12mm	
L402	2901-000297	FILTER-EMI ON BOARD;- ,3A,-,-,3.5x5,TP,-		R403	2001-001114	R-CARBON(S):270OHM,5%,1/2W,AA,TP,2.4X6.4MM	
L601	2701-000146	INDUCTOR-AXIAL:2.2uH,10%,2.5x3.4mm		R404	2008-000294	R-FUSIBLE(S):33ohm,5%,2W,AF,TP,3.9x10mm	
L702	2701-000184	INDUCTOR-AXIAL:4.7uH,10%,2.5x3.4mm		R405	2001-001410	R-CARBON(S):43OHM,5%,1/2W,AA,TP,2.4X6.4MM	
L703	2701-000184	INDUCTOR-AXIAL:4.7uH,10%,2.5x3.4mm		R406	2001-000037	R-CARBON(S):330OHM,5%,1/2W,AA,TP,2.4X6.4MM	
L704	2701-000184	INDUCTOR-AXIAL:4.7uH,10%,2.5x3.4mm		R407	2001-001037	R-CARBON(S):0.39OHM,5%,1/2W,AA,TP,2.4X6.4M	
L706	2701-000184	INDUCTOR-AXIAL:4.7uH,10%,2.5x3.4mm		R408	2001-000022	R-CARBON(S):33OHM,5%,1/2W,AA,TP,2.4X6.4MM	
L801	AA29-30001B	FILTER-LINE;- ,27mH,-,-,-		R409	2008-000204	R-FUSIBLE(S):0.22ohm,10%,1/2W,AF,TP,2.5x6.5	
L804	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,2400G		R412	2003-000664	R-METAL OXIDE(S):33ohm,5%,2W,AF,TP,4x12mm	
L805	2901-000297	FILTER-EMI ON BOARD;- ,3A,-,-,3.5x5,TP,-		R413	2003-000784	R-METAL OXIDE(S):7.5Kohm,5%,2W,AF,TP,4x12mm	
L807	2901-000297	FILTER-EMI ON BOARD;- ,3A,-,-,3.5x5,TP,-		R414	2003-000540	R-METAL OXIDE(S):1Kohm,5%,2W,AF,TP,4x12mm	
L809	2701-001032	INDUCTOR-AXIAL:100uH,10%,5x14mm		R415	2008-000206	R-FUSIBLE(S):1ohm,5%,1/2W,AF,TP,2.5x6.5mm	
L810	2701-001032	INDUCTOR-AXIAL:100uH,10%,5x14mm		R416	2008-000277	R-FUSIBLE:68ohm,5%,1/2W,AA,TP,4.7x11mm	
L902	2701-000189	INDUCTOR-AXIAL:470nH,10%,2.5x3.4mm		R417	2008-000265	R-FUSIBLE(S):1ohm,5%,2W,AA,TP,3.9x10mm	
L904	2701-000299	INDUCTOR-AXIAL:13uH,10%,2.5x3.4mm		R420	2004-001377	R-METAL(S):120Kohm,1%,1/2W,AA,TP,2.4x6.4m	
LD901	AA96-30007A	ASSY-LED,GUIDE;- ,AA61-50055A,DL-GTGA,GREEN		R501H	2002-001008	R-COMPOSITION:1.8Kohm,5%,1/2W,AA,TP,3.7x9mm	
NT801	1404-001075	THERMISTOR-NTC;5ohm,15%,- ,17mW/C,TP		R502H	2002-001008	R-COMPOSITION:1.8Kohm,5%,1/2W,AA,TP,3.7x9mm	
P801	1404-001048	THERMISTOR-PTC;7ohm,30%,200/220V,270V,19A,-,B		R503	2002-001008	R-COMPOSITION:1.8Kohm,5%,1/2W,AA,TP,3.7x9mm	
PC801	0604-001038	PHOTO-COUPLER;TR,130-260%,200mW,DIP,4,ST		R504	2001-001062	R-CARBON(S):10MOHM,5%,1/2W,AA,TP,2.4X6.4MM	
Q201	0501-002183	TR-SMALL SIGNAL:KTC9014,NPN,625mW,TO-92,TP,100		R505	2008-001011	R-FUSIBLE(S):0.18ohm,10%,2W,AF,TP,3.9x10mm	
Q202	0501-002183	TR-SMALL SIGNAL:KTC9014,NPN,625mW,TO-92,TP,100		R510	2001-000281	R-CARBON:100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
Q204	0501-002183	TR-SMALL SIGNAL:KTC9014,NPN,625mW,TO-92,TP,100		R511	2001-000281	R-CARBON:100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
△ Q401	0502-001115	TR-POWER;KSC5386,NPN,50W,TO-3PF,ST,8-		R512	2001-000281	R-CARBON:100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
△ Q402	0501-000369	TR-SMALL SIGNAL:KSC2331-Y,NPN,1W,TO-92L,-,120-		R603	2001-000241	R-CARBON:1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
Q701	0501-002183	TR-SMALL SIGNAL:KTC9014,NPN,625mW,TO-92,TP,100		R604	2001-000734	R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
Q703	0501-000283	TR-SMALL SIGNAL:KSA539,PNP,400mW,TO-92,TP,120-		R605	2001-000563	R-CARBON:27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
Q901	0501-002183	TR-SMALL SIGNAL:KTC9014,NPN,625mW,TO-92,TP,100		R606	2001-000723	R-CARBON:4.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
Q903	0501-002183	TR-SMALL SIGNAL:KTC9014,NPN,625mW,TO-92,TP,100		R610	2001-000563	R-CARBON:27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
Q904	0504-000123	TR-DIGITAL:KSR1010,NPN,300mW,10K,TO-92,TP		R611	2001-000723	R-CARBON:4.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
Q905	0504-000123	TR-DIGITAL:KSR1010,NPN,300mW,10K,TO-92,TP		R701	2001-000281	R-CARBON:100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
Q906	0504-000123	TR-DIGITAL:KSR1010,NPN,300mW,10K,TO-92,TP		R702	2001-000969	R-CARBON:75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
Q907	0504-000125	TR-DIGITAL:KSR1012,NPN,300mW,47K,TO-92,TP		R703	2001-000429	R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
Q908	0504-000123	TR-DIGITAL:KSR1010,NPN,300mW,10K,TO-92,TP		R705	2001-000003	R-CARBON:330OHM,5%,1/8W,AA,TP,1.8X3.2MM	
QA01	0501-002183	TR-SMALL SIGNAL:KTC9014,NPN,625mW,TO-92,TP,100		R706	2001-000221	R-CARBON:1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R200	2001-000780	R-CARBON:470OHM,5%,1/8W,AA,TP,1.8X3.2MM		R713	2001-000812	R-CARBON:5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R201	2001-000005	R-CARBON:390OHM,5%,1/8W,AA,TP,1.8X3.2MM		R714	2001-000429	R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R202	2001-000281	R-CARBON:100OHM,5%,1/8W,AA,TP,1.8X3.2MM		R715	2001-000812	R-CARBON:5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R203	2001-000281	R-CARBON:100OHM,5%,1/8W,AA,TP,1.8X3.2MM		R717	2001-000812	R-CARBON:5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R204	2001-000281	R-CARBON:100OHM,5%,1/8W,AA,TP,1.8X3.2MM		R801	2003-000994	R-METAL OXIDE(S):33Kohm,5%,2W,AF,TP,3.9x10mm	
R207	2001-000008	R-CARBON:15KOHM,5%,1/8W,AA,TP,1.8X3.2MM		R802	2003-000994	R-METAL OXIDE(S):33Kohm,5%,2W,AF,TP,3.9x10mm	
R208	2001-000005	R-CARBON:390OHM,5%,1/8W,AA,TP,1.8X3.2MM		R803	2001-001178	R-CARBON(S):680OHM,5%,1/2W,AA,TP,2.4X6.4MM	
R209	2701-000114	INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm		R805	2001-001134	R-CARBON(S):360ohm,5%,1/2W,AA,BK,2.4x6.4mm	
R210	2001-000429	R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM		R806	2002-001011	R-COMPOSITION:3.3Mohm,10%,1/2W,AA,TP,3.7x9mm	
R211	2001-000331	R-CARBON:12KOHM,5%,1/8W,AA,TP,1.8X3.2MM		R807	2002-001011	R-COMPOSITION:3.3Mohm,10%,1/2W,AA,TP,3.7x9mm	
R212	2001-000281	R-CARBON:100OHM,5%,1/8W,AA,TP,1.8X3.2MM		R808	2001-000022	R-CARBON(S):33OHM,5%,1/2W,AA,TP,2.4X6.4MM	
R213	2001-000281	R-CARBON:100OHM,5%,1/8W,AA,TP,1.8X3.2MM		R809	2001-000622	R-CARBON:300KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R214	2001-000281	R-CARBON:100OHM,5%,1/8W,AA,TP,1.8X3.2MM		R810	2003-000527	R-METAL OXIDE(S):18Kohm,5%,2W,AA,TP,4x12mm	
R215	2001-001015	R-CARBON:9.1KOHM,5%,1/8W,AA,TP,1.8X3.2M		R811	2001-001134	R-CARBON(S):360ohm,5%,1/2W,AA,BK,2.4x6.4mm	
R216	2001-000490	R-CARBON:200OHM,5%,1/8W,AA,TP,1.8X3.2MM		R812	2003-000455	R-METAL OXIDE(S):100ohm,5%,2W,AA,TP,4x12mm	
R217	2001-000449	R-CARBON:2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M		R814	2008-001073	R-FUSIBLE(S):0.68ohm,5%,2W,AA,TP,3.9x10mm	
R218	2001-000591	R-CARBON:3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M		R815	2008-001073	R-FUSIBLE(S):0.68ohm,5%,2W,AA,TP,3.9x10mm	
R219	2001-000008	R-CARBON:15KOHM,5%,1/8W,AA,TP,1.8X3.2MM		R816	2004-004089	R-METAL(S):123Kohm,1%,1/2W,AA,TP,2.5x6.5m	
R221	2001-000290	R-CARBON:10KOHM,5%,1/8W,AA,TP,1.8X3.2MM		R817	2004-001983	R-METAL(S):2.49Kohm,1%,1/2W,AA,TP,2.4x6.4	
R223	2001-000938	R-CARBON:68OHM,5%,1/8W,AA,TP,1.8X3.2MM		R818	2004-001371	R-METAL(S):1.5Kohm,1%,1/2W,AA,TP,2.4x6.4m	
R224	2001-000563	R-CARBON:27KOHM,5%,1/8W,AA,TP,1.8X3.2MM		R819	2004-001390	R-METAL(S):1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
R225	2001-000554	R-CARBON:270OHM,5%,1/8W,AA,TP,1.8X3.2MM		R820	2008-000299	R-FUSIBLE(S):47ohm,5%,2W,AF,TP,3.9x10mm	
R226	2001-000281	R-CARBON:100OHM,5%,1/8W,AA,TP,1.8X3.2MM		R821	2008-000266	R-FUSIBLE(S):1ohm,5%,2W,AF,TP,3.9x10mm	

Loc. No.	Code No.	Description ; Specification	Remark	Loc. No.	Code No.	Description ; Specification	Remark
R822	2001-001150	R-CARBON(S):470KOHM,5%,1/2W,AA,TP,2.4X6.4M					
R823	2001-001150	R-CARBON(S):470KOHM,5%,1/2W,AA,TP,2.4X6.4M					
R824	2001-001134	R-CARBON(S):360ohm,5%,1/2W,AA,BK,2.4x6.4mm					
R825	2003-001040	R-METAL OXIDE(S):47Kohm,5%,2W,AF,TP,3.9x10mm		*	AA95-90023	MASSY-PCB,A/V FRONT:-,5066,5366,SCT13B,PAL,-,-,	
R901	2001-000832	R-CARBON:510OHM,5%,1/8W,AA,TP,1.8X3.2MM		CE01	2401-001840	C-AL:100uF,20%,16V,GP,TP,6.3x11,5	
R902	2001-000734	R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M		CE03	2401-001989	C-AL:4.7uF,20%,50V,BP,TP,5x11,5	
R903	2001-000281	R-CARBON:1000OHM,5%,1/8W,AA,TP,1.8X3.2MM		CE06	2202-000862	C-CERAMIC,MLC-AXIAL:390pF,10%,50V,Y5P,TP,3.5x1.9,-	
R904	2001-000281	R-CARBON:1000OHM,5%,1/8W,AA,TP,1.8X3.2MM		CE07	2202-000222	C-CERAMIC,MLC-AXIAL:3.3nF,20%,16V,Y5P,TP,-,7.5	
R905	2001-000241	R-CARBON:1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M		CN702	AA39-20461C	LEAD CONNECTOR-ASSY:-,YBNH250-11,67096-011,11,300,	
R906	2001-000472	R-CARBON:2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M		JA702	3722-000506	JACK-RCA:2P,3.6mm,-,AG	
R907	2001-000995	R-CARBON:8200HM,5%,1/8W,AA,TP,1.8X3.2MM		JE601	3722-000143	JACK-PHONE:1P(VER),3.4mm,AG,BLK,NO	
R908	2001-000232	R-CARBON:1.3KOHM,5%,1/8W,AA,TP,1.8X3.2M		QE01	0501-000283	TR-SMALL SIGNAL:KSA539,PNP,400mW,TO,-92,TP,120-	
R909	2001-000605	R-CARBON:3.6KOHM,5%,1/8W,AA,TP,1.8X3.2M		RE01	2001-001153	R-CARBON(S):470HM,5%,1/2W,AA,TP,2.4X6.4MM	
R910	2001-000290	R-CARBON:10KOHM,5%,1/8W,AA,TP,1.8X3.2MM		RE02	2001-001153	R-CARBON(S):470HM,5%,1/2W,AA,TP,2.4X6.4MM	
R912	2001-000924	R-CARBON:680OHM,5%,1/8W,AA,TP,1.8X3.2MM		RE03	2001-000010	R-CARBON:68KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R916	2001-000281	R-CARBON:1000OHM,5%,1/8W,AA,TP,1.8X3.2MM		RE04	2001-000429	R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R917	2001-000281	R-CARBON:1000OHM,5%,1/8W,AA,TP,1.8X3.2MM		RE05	2001-000009	R-CARBON:20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R918	2001-000281	R-CARBON:1000OHM,5%,1/8W,AA,TP,1.8X3.2MM					
R919	2001-000290	R-CARBON:10KOHM,5%,1/8W,AA,TP,1.8X3.2MM					
R920	2001-000864	R-CARBON:56KOHM,5%,1/8W,AA,TP,1.8X3.2MM					
R922	2001-000281	R-CARBON:1000OHM,5%,1/8W,AA,TP,1.8X3.2MM					
R923	2001-000281	R-CARBON:1000OHM,5%,1/8W,AA,TP,1.8X3.2MM					
R924	2001-000449	R-CARBON:2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M					
R925	2001-000449	R-CARBON:2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M					
R926	2001-000290	R-CARBON:10KOHM,5%,1/8W,AA,TP,1.8X3.2MM					
R927	2001-000290	R-CARBON:10KOHM,5%,1/8W,AA,TP,1.8X3.2MM					
R928	2001-000066	R-CARBON(S):10KOHM,5%,1/2W,AA,TP,2.4X6.4MM					
R929	2004-000253	R-METAL:11Kohm,1%,1/8W,AA,TP,1.8x3.2mm					
R930	2004-000218	R-METAL:10Kohm,1%,1/8W,AA,TP,1.8x3.2mm					
R931	2004-000218	R-METAL:10Kohm,1%,1/8W,AA,TP,1.8x3.2mm					
R934	2001-000449	R-CARBON:2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M					
R936	2001-000734	R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M					
R937	2001-000734	R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M					
R938	2001-000472	R-CARBON:2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M					
R940	2001-000660	R-CARBON:33KOHM,5%,1/8W,AA,TP,1.8X3.2MM					
R946	2001-000429	R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM					
R947	2001-000429	R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM					
R948	2001-000241	R-CARBON:1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M					
R951	2001-000734	R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M					
R952	2001-000281	R-CARBON:1000OHM,5%,1/8W,AA,TP,1.8X3.2MM					
R954	2001-000006	R-CARBON:2.4KOHM,5%,1/8W,AA,TP,1.8X3.2M					
R956	2001-000429	R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM					
R960	2001-000290	R-CARBON:10KOHM,5%,1/8W,AA,TP,1.8X3.2MM					
R962	2001-000273	R-CARBON:100KOHM,5%,1/8W,AA,TP,1.8X3.2M					
RA01	2001-000924	R-CARBON:680OHM,5%,1/8W,AA,TP,1.8X3.2MM					
RA02	2001-000241	R-CARBON:1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M					
RA03	2001-000734	R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M					
RA04	2001-000734	R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M					
RL901	AA59-60001U	MODULE-REMOCON:-,ORC-50VF/SR-12V,38KHz,940nm,					
RW701	2011-001133	R-NETWORK:33K/24K/75x3,5%,1/8W,X,SIP,6P,					
RW702	2011-001098	R-NETWORK:75/75/1K/75OHM,5%,1/8W,-,SIP5					
RX801	2002-001011	R-COMPOSITION:3.3Mohm,10%,1/2W,AA,TP,3.7x9mm					
SFN02	2904-001063	FILTER-SAW AV:38.9MHz,SIP5K,TP,17dB,PAL-B/G,					
SW801	3403-000179	SWITCH-PUSH:250V,5A,DPST,-,JPW-2104B					
SW901	3404-000244	SWITCH-TACT:15V,20mA,90-170gf,7.5x7mm,SPST					
SW902	3404-000244	SWITCH-TACT:15V,20mA,90-170gf,7.5x7mm,SPST					
SW903	3404-000244	SWITCH-TACT:15V,20mA,90-170gf,7.5x7mm,SPST					
SW904	3404-000244	SWITCH-TACT:15V,20mA,90-170gf,7.5x7mm,SPST					
SW905	3404-000244	SWITCH-TACT:15V,20mA,90-170gf,7.5x7mm,SPST					
T401	AA26-50001B	HORIZ.DRIVE:-,7.1mH,102uH,10-20uH,YL081,ST					
T444	AA26-30001Y	TRANS-FLYBACK:-,FSV-20A001,20,125V					
T801	AA26-20007Q	TRANS-SWITCHING:-,180-260V,125V/12.5V,EN,EER28					
TU01	AA40-10006P	TUNER-V/S:TECC0949VG28B(S),PAL-B/G,TR,18					
V999	3704-001090	SOCKET-CRT:9P,15.24PI,26.5PI,SN,-					
X202	2801-000226	CRYSTAL-UNIT:3.579545MHz,20ppm,28-AAM,15pF,					
X203	2801-000274	CRYSTAL-UNIT:4.433619MHz,30ppm,28-AAM,20pF,					
X901	2801-000724	CRYSTAL-UNIT:6MHz,50ppm,28-AAM,20pF,40ohm,T					
Z201	2903-000199	FILTER-CERAMIC,TR,6.5MHz,70KHz,-,TP,-					
Z202	2903-000181	FILTER-CERAMIC,TR,5.5MHz,-,-,TP,TPS5.5MB-TF					
Z204	2903-000184	FILTER-CERAMIC,BP,5.5MHz,+60KHz,6dB,-,TP,-					
Z205	2903-000202	FILTER-CERAMIC,BP,6.5MHz,+80KHz,6dB,-,TP,-					
Z206	2903-000184	FILTER-CERAMIC,BP,5.5MHz,+60KHz,6dB,-,TP,-					
Z210	2903-000200	FILTER-CERAMIC,BP,6.5MHz,+70KHz,6dB,-,TP,-					
	AA39-20010D	LEAD-CONNECTOR,ASSY:-,YFH800-01,S,1P,400,1617#22					


8. Block Diagram

8-1 S15A


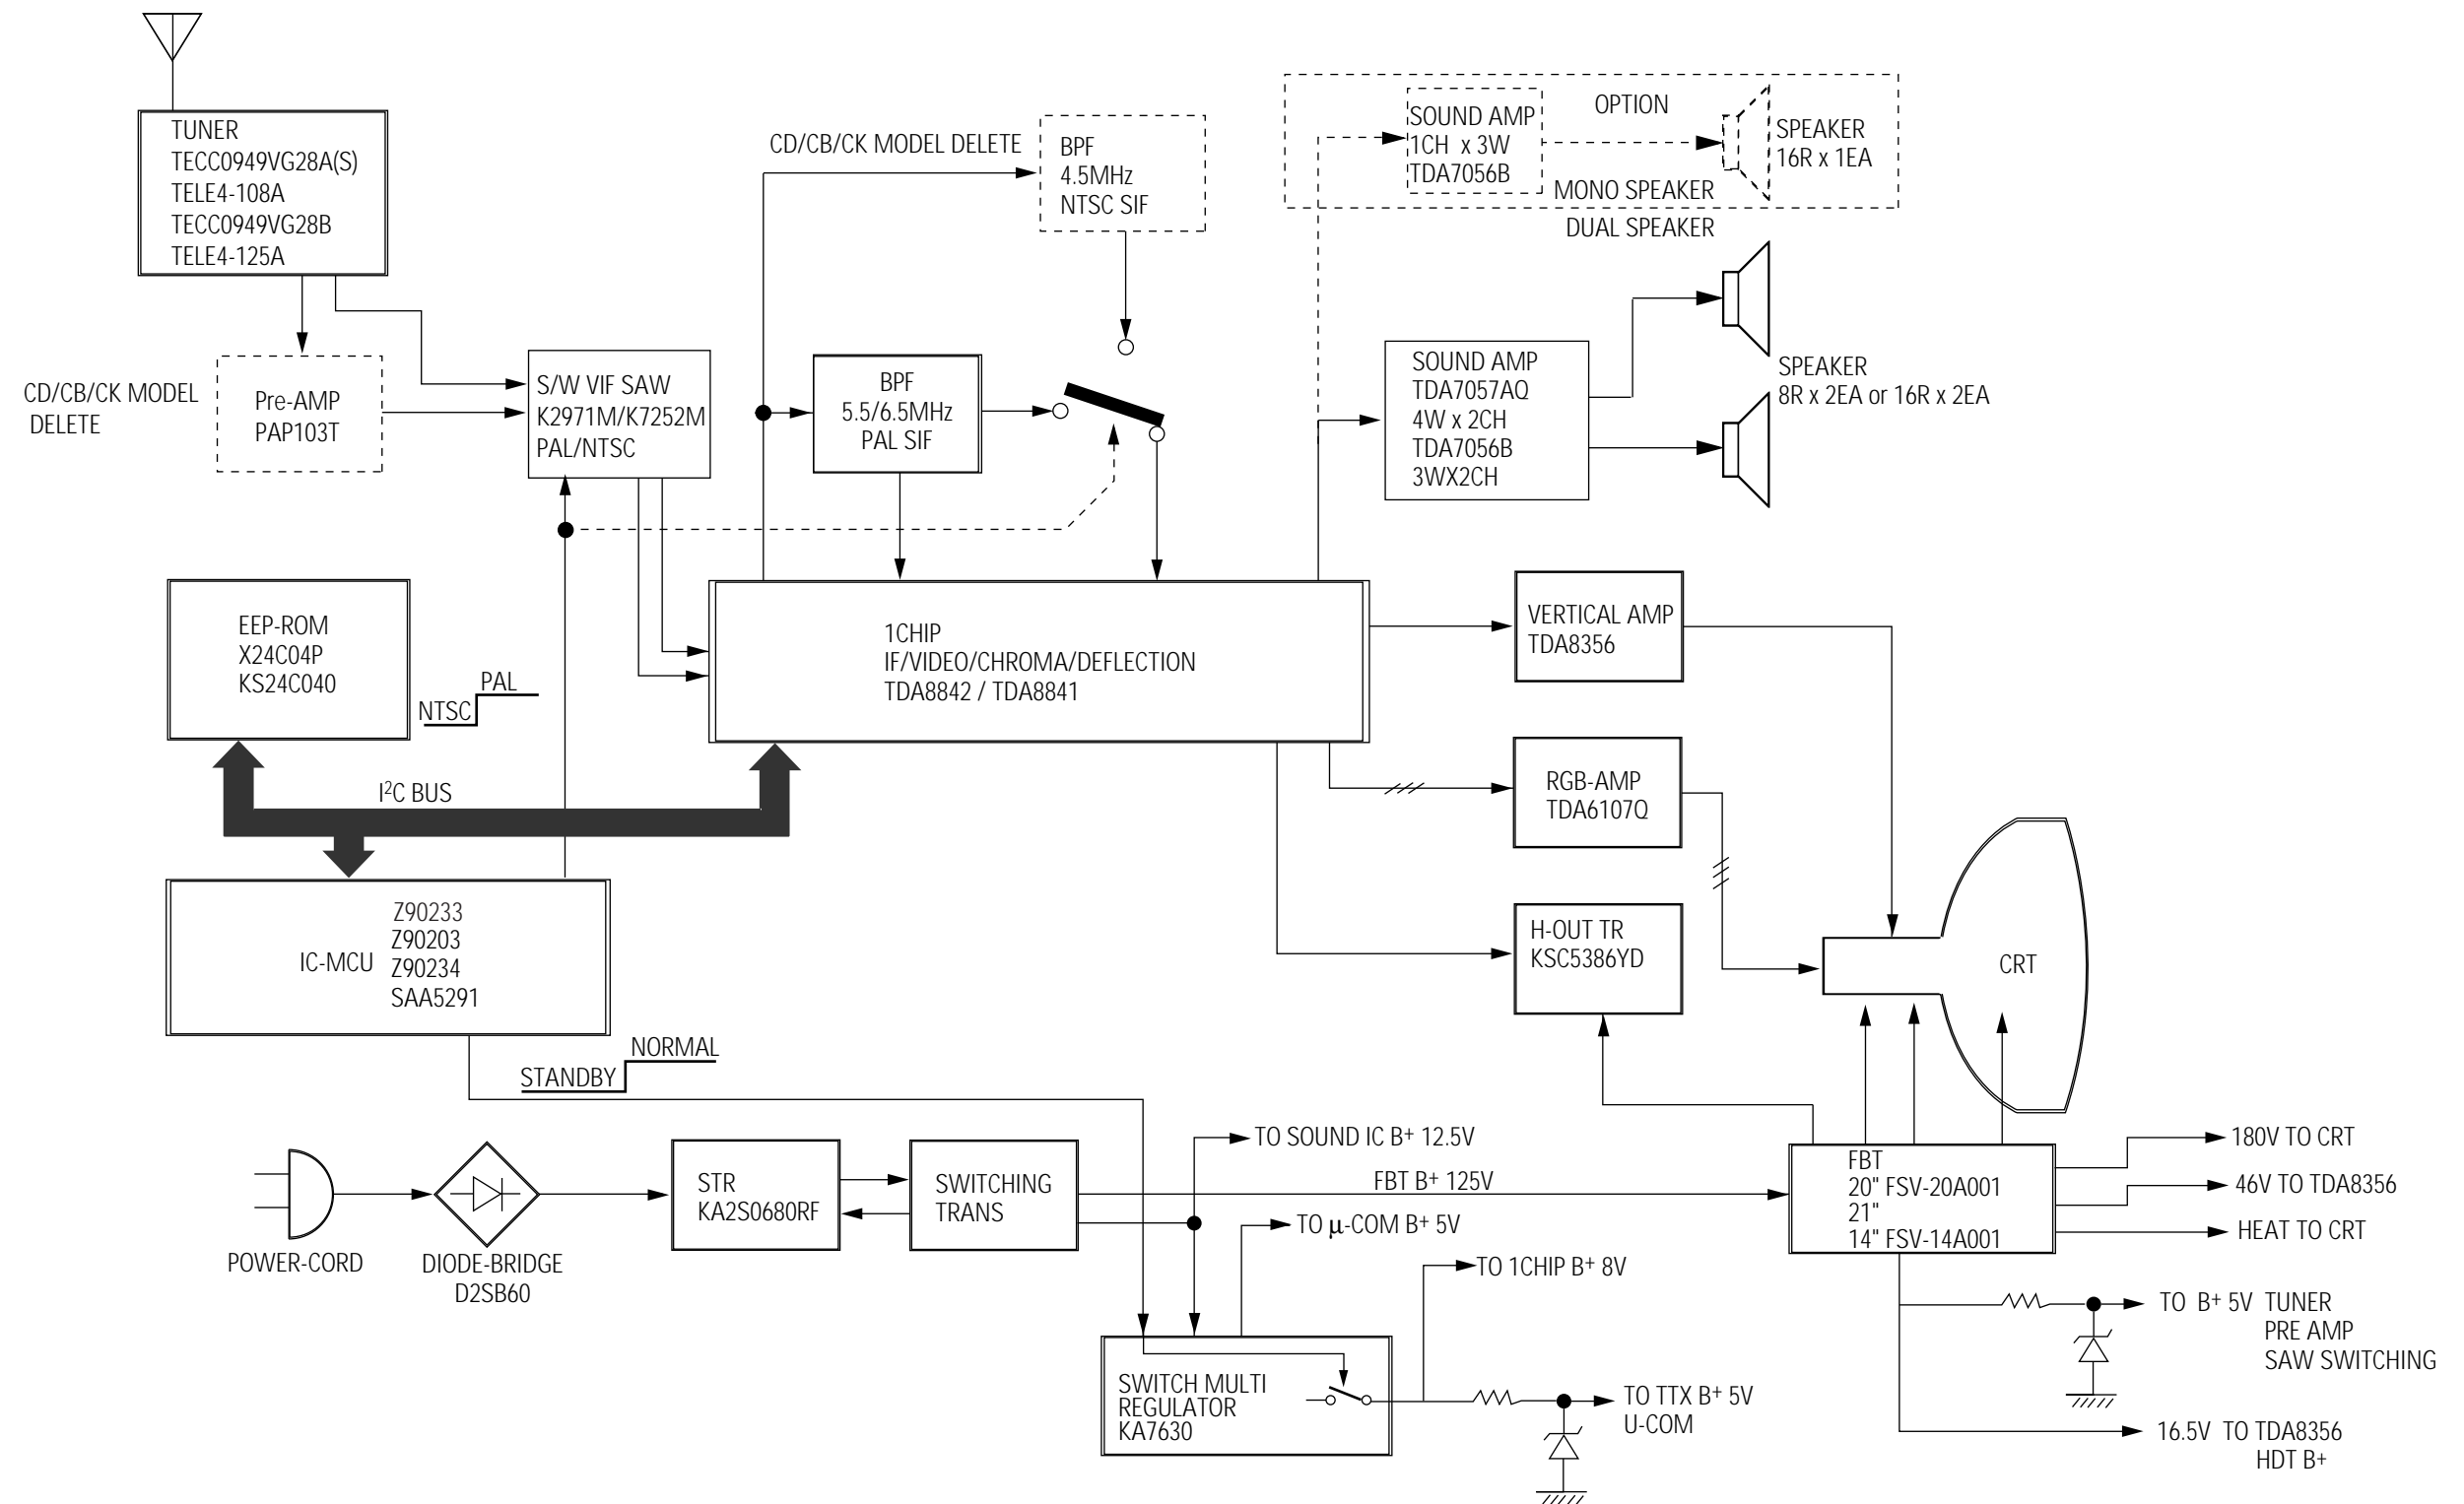


10. Wiring Diagram

10-1 S15A

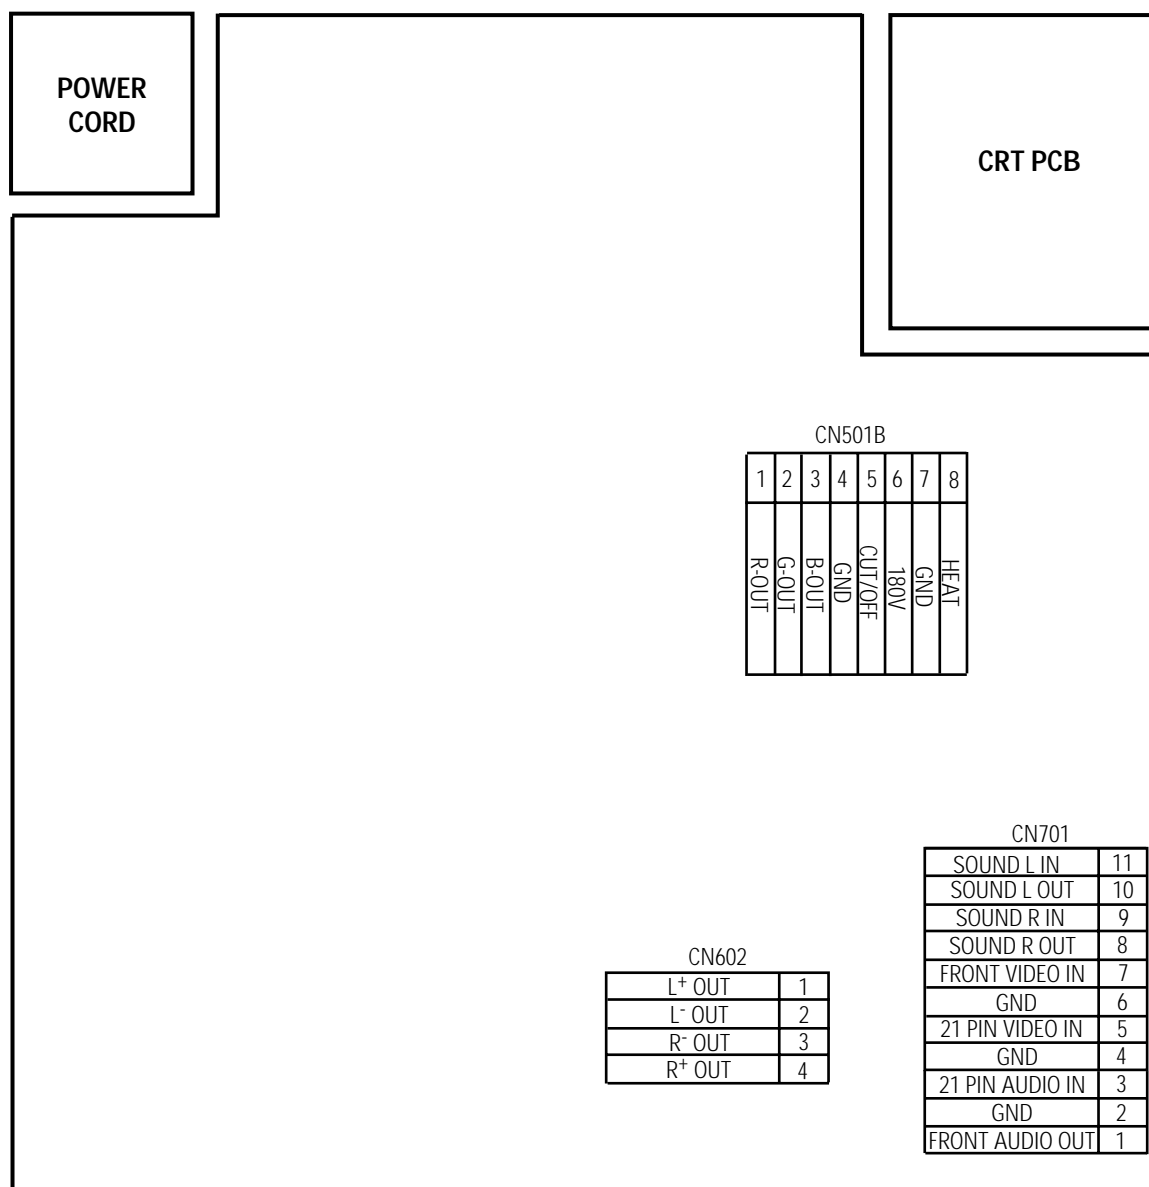


11-2 SOUND, EXT-A/V (Europe/Africa)

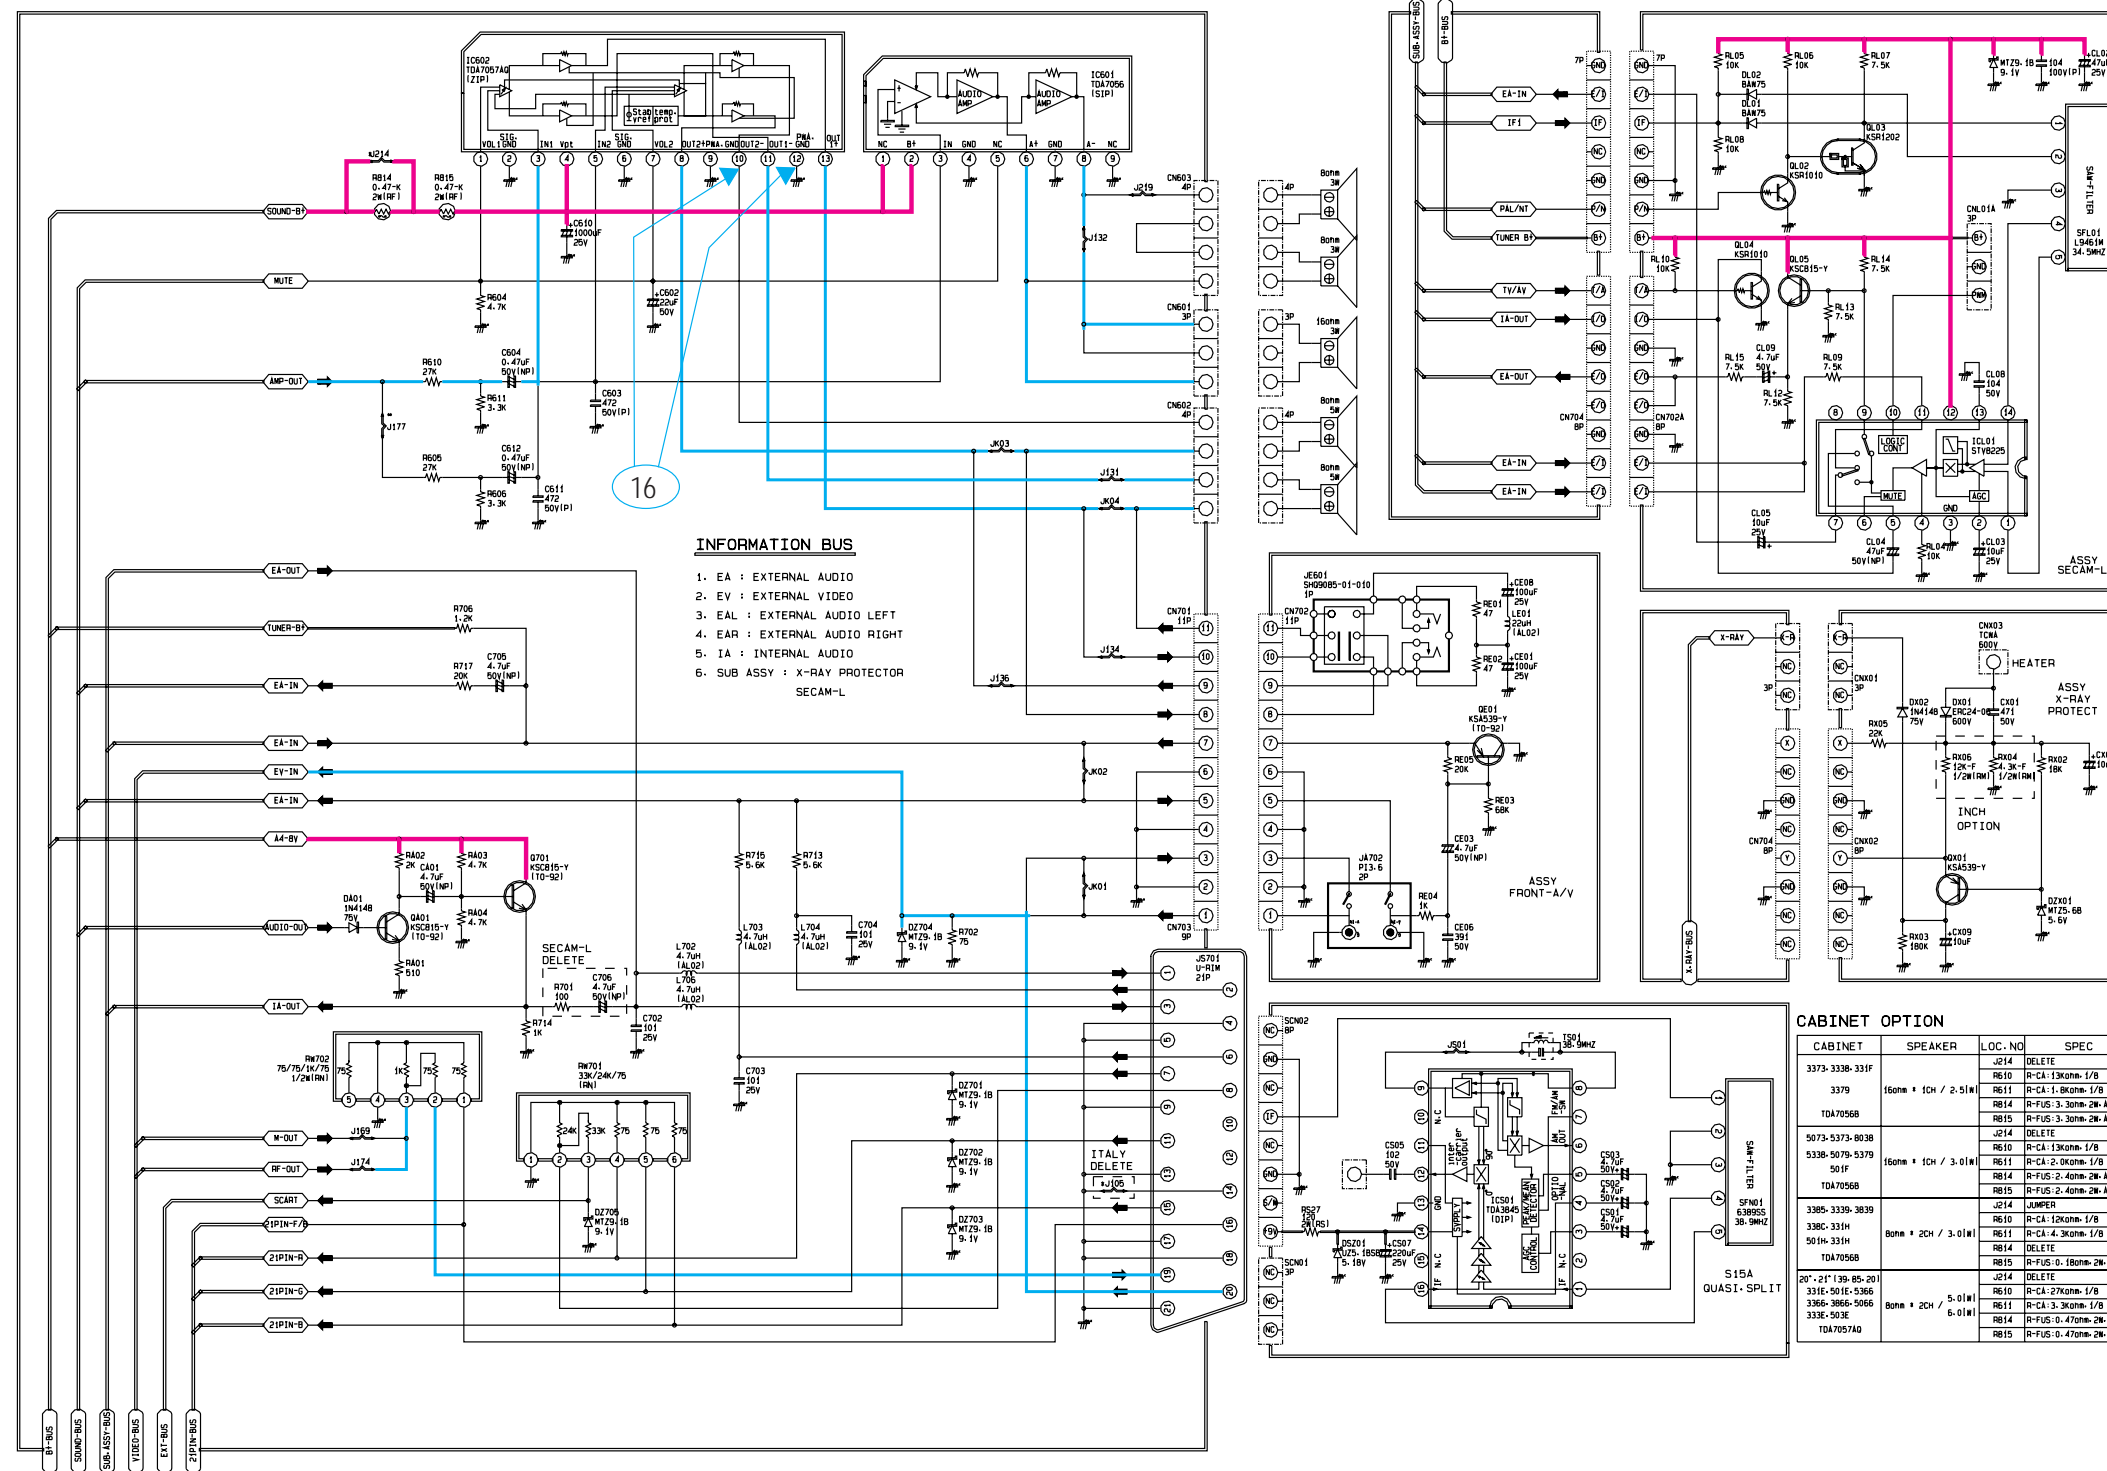









 : Power Line
 : Signal Line


11-3 SOUND, EXT-A/V (Middle East / Asia)

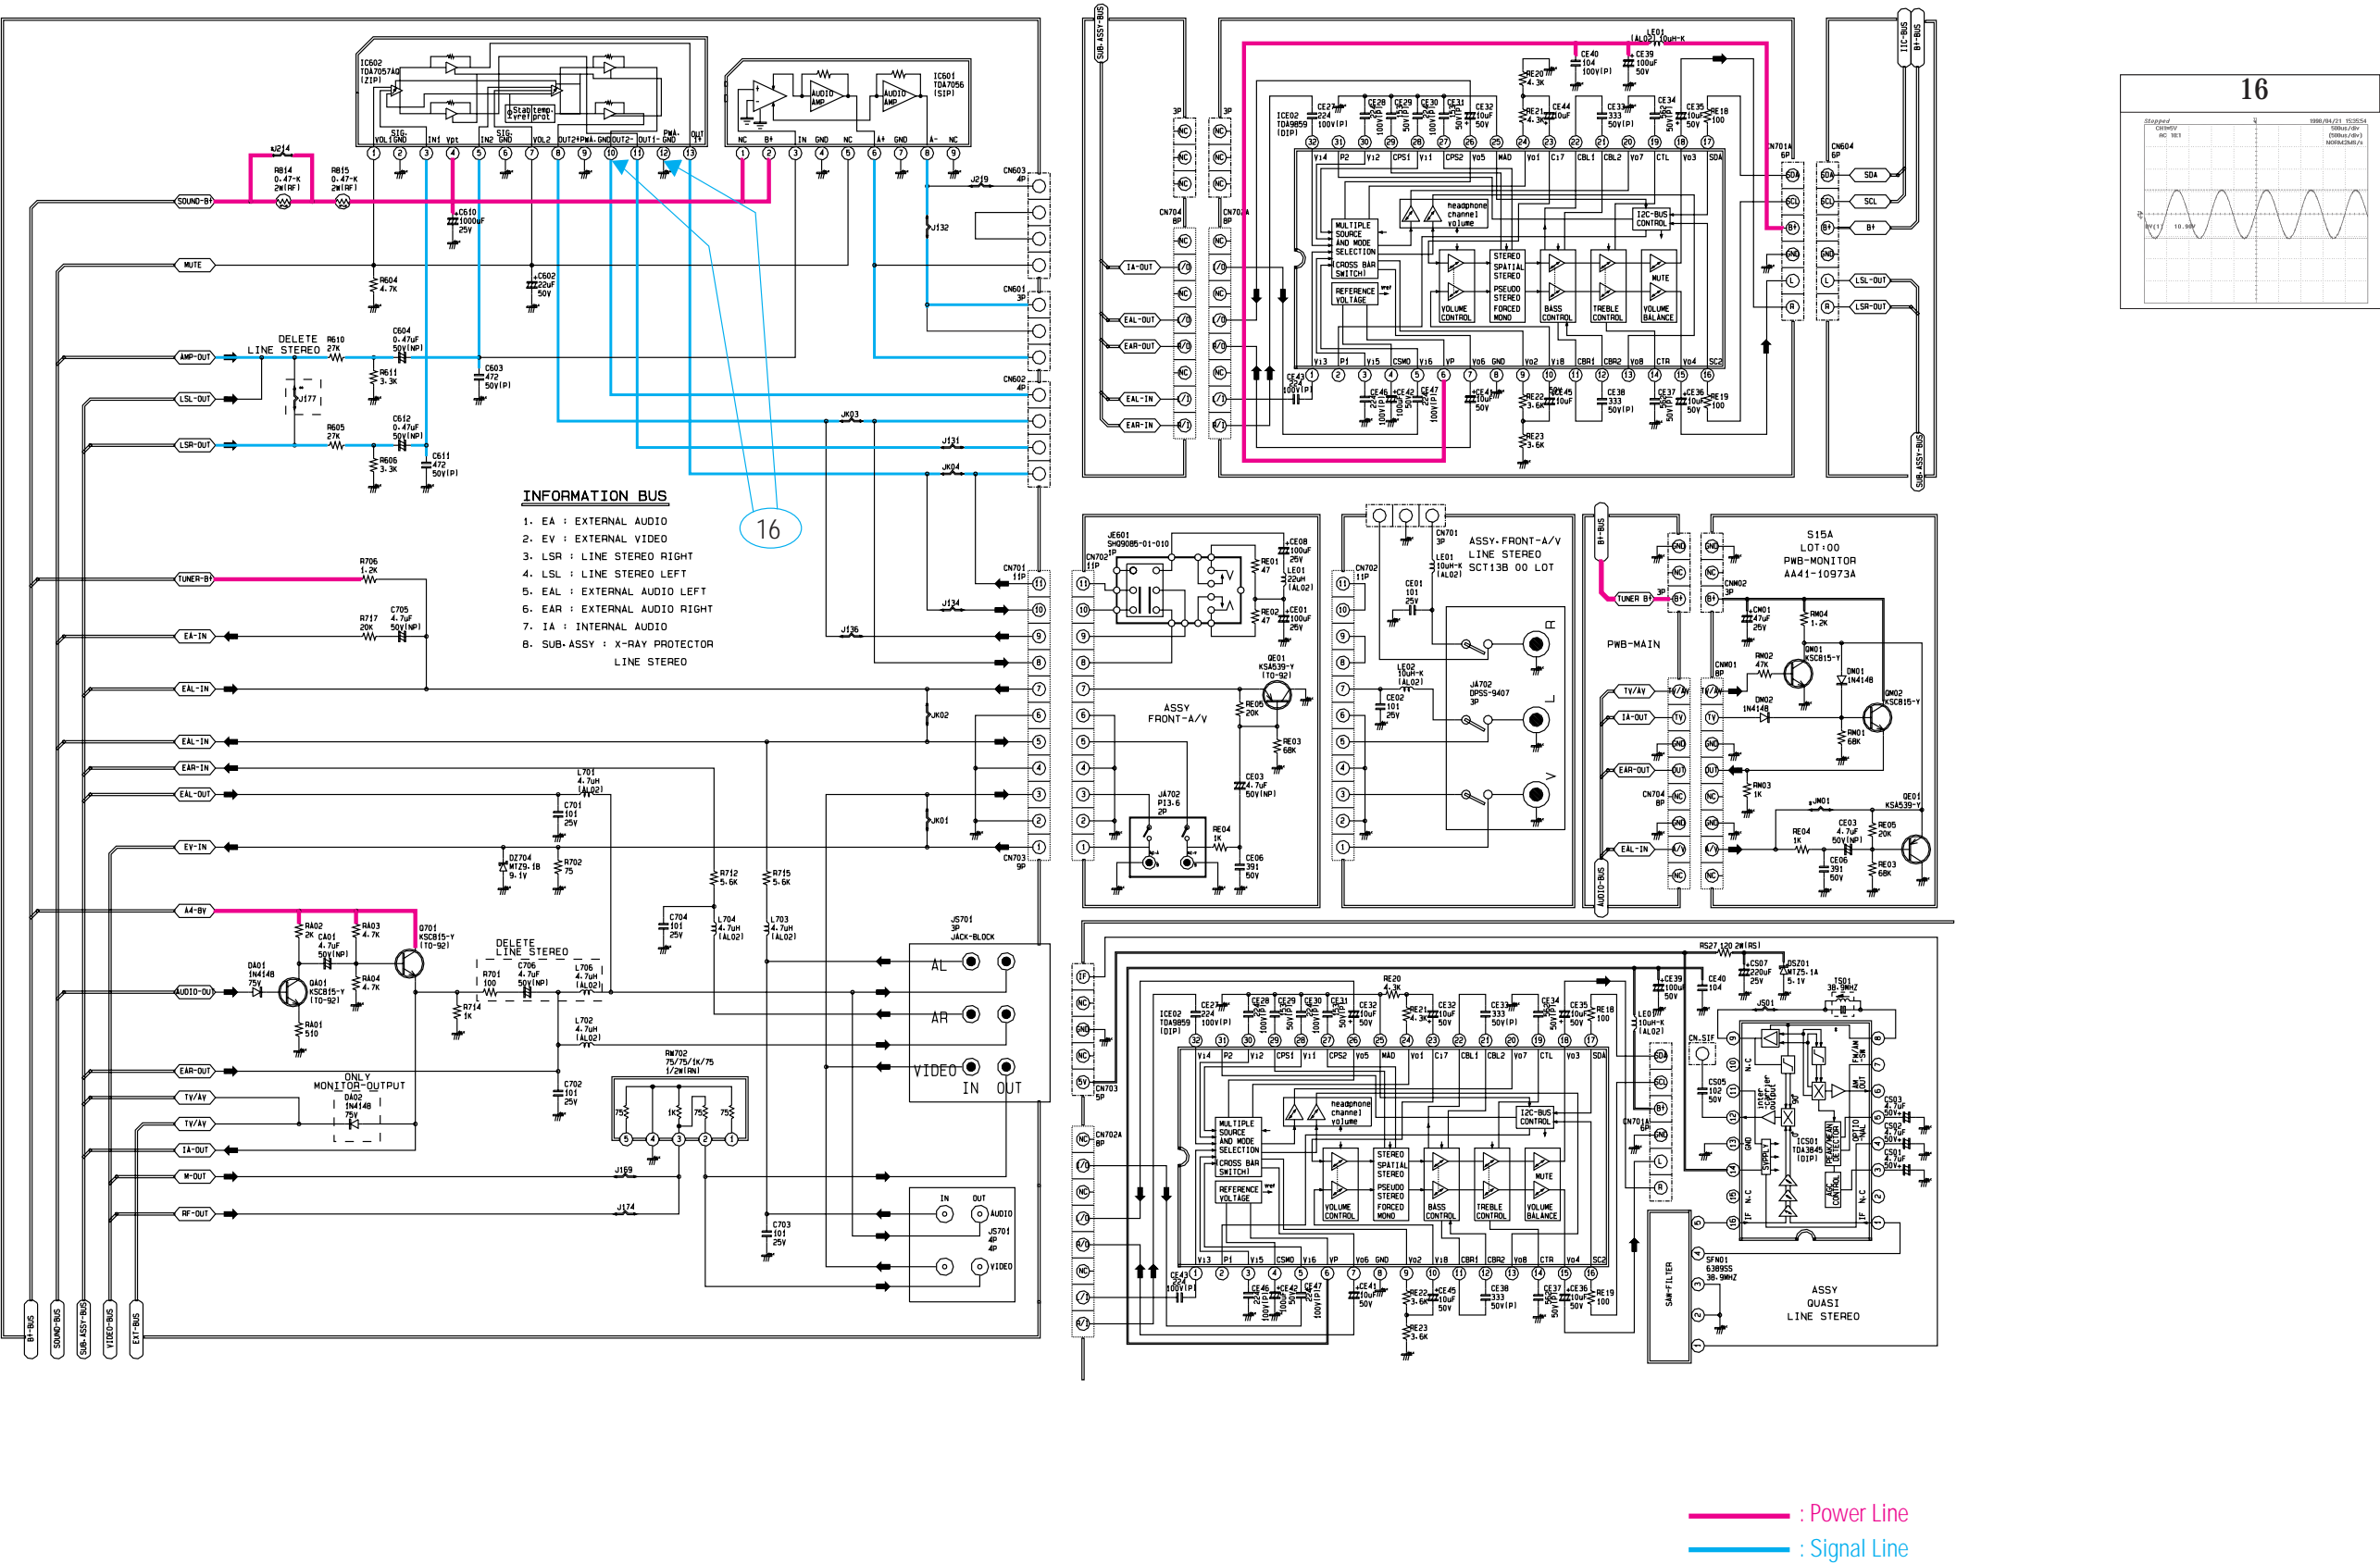





Schematic Diagrams

11-4 POWER / CRT / VERTICAL / HORIZONTAL

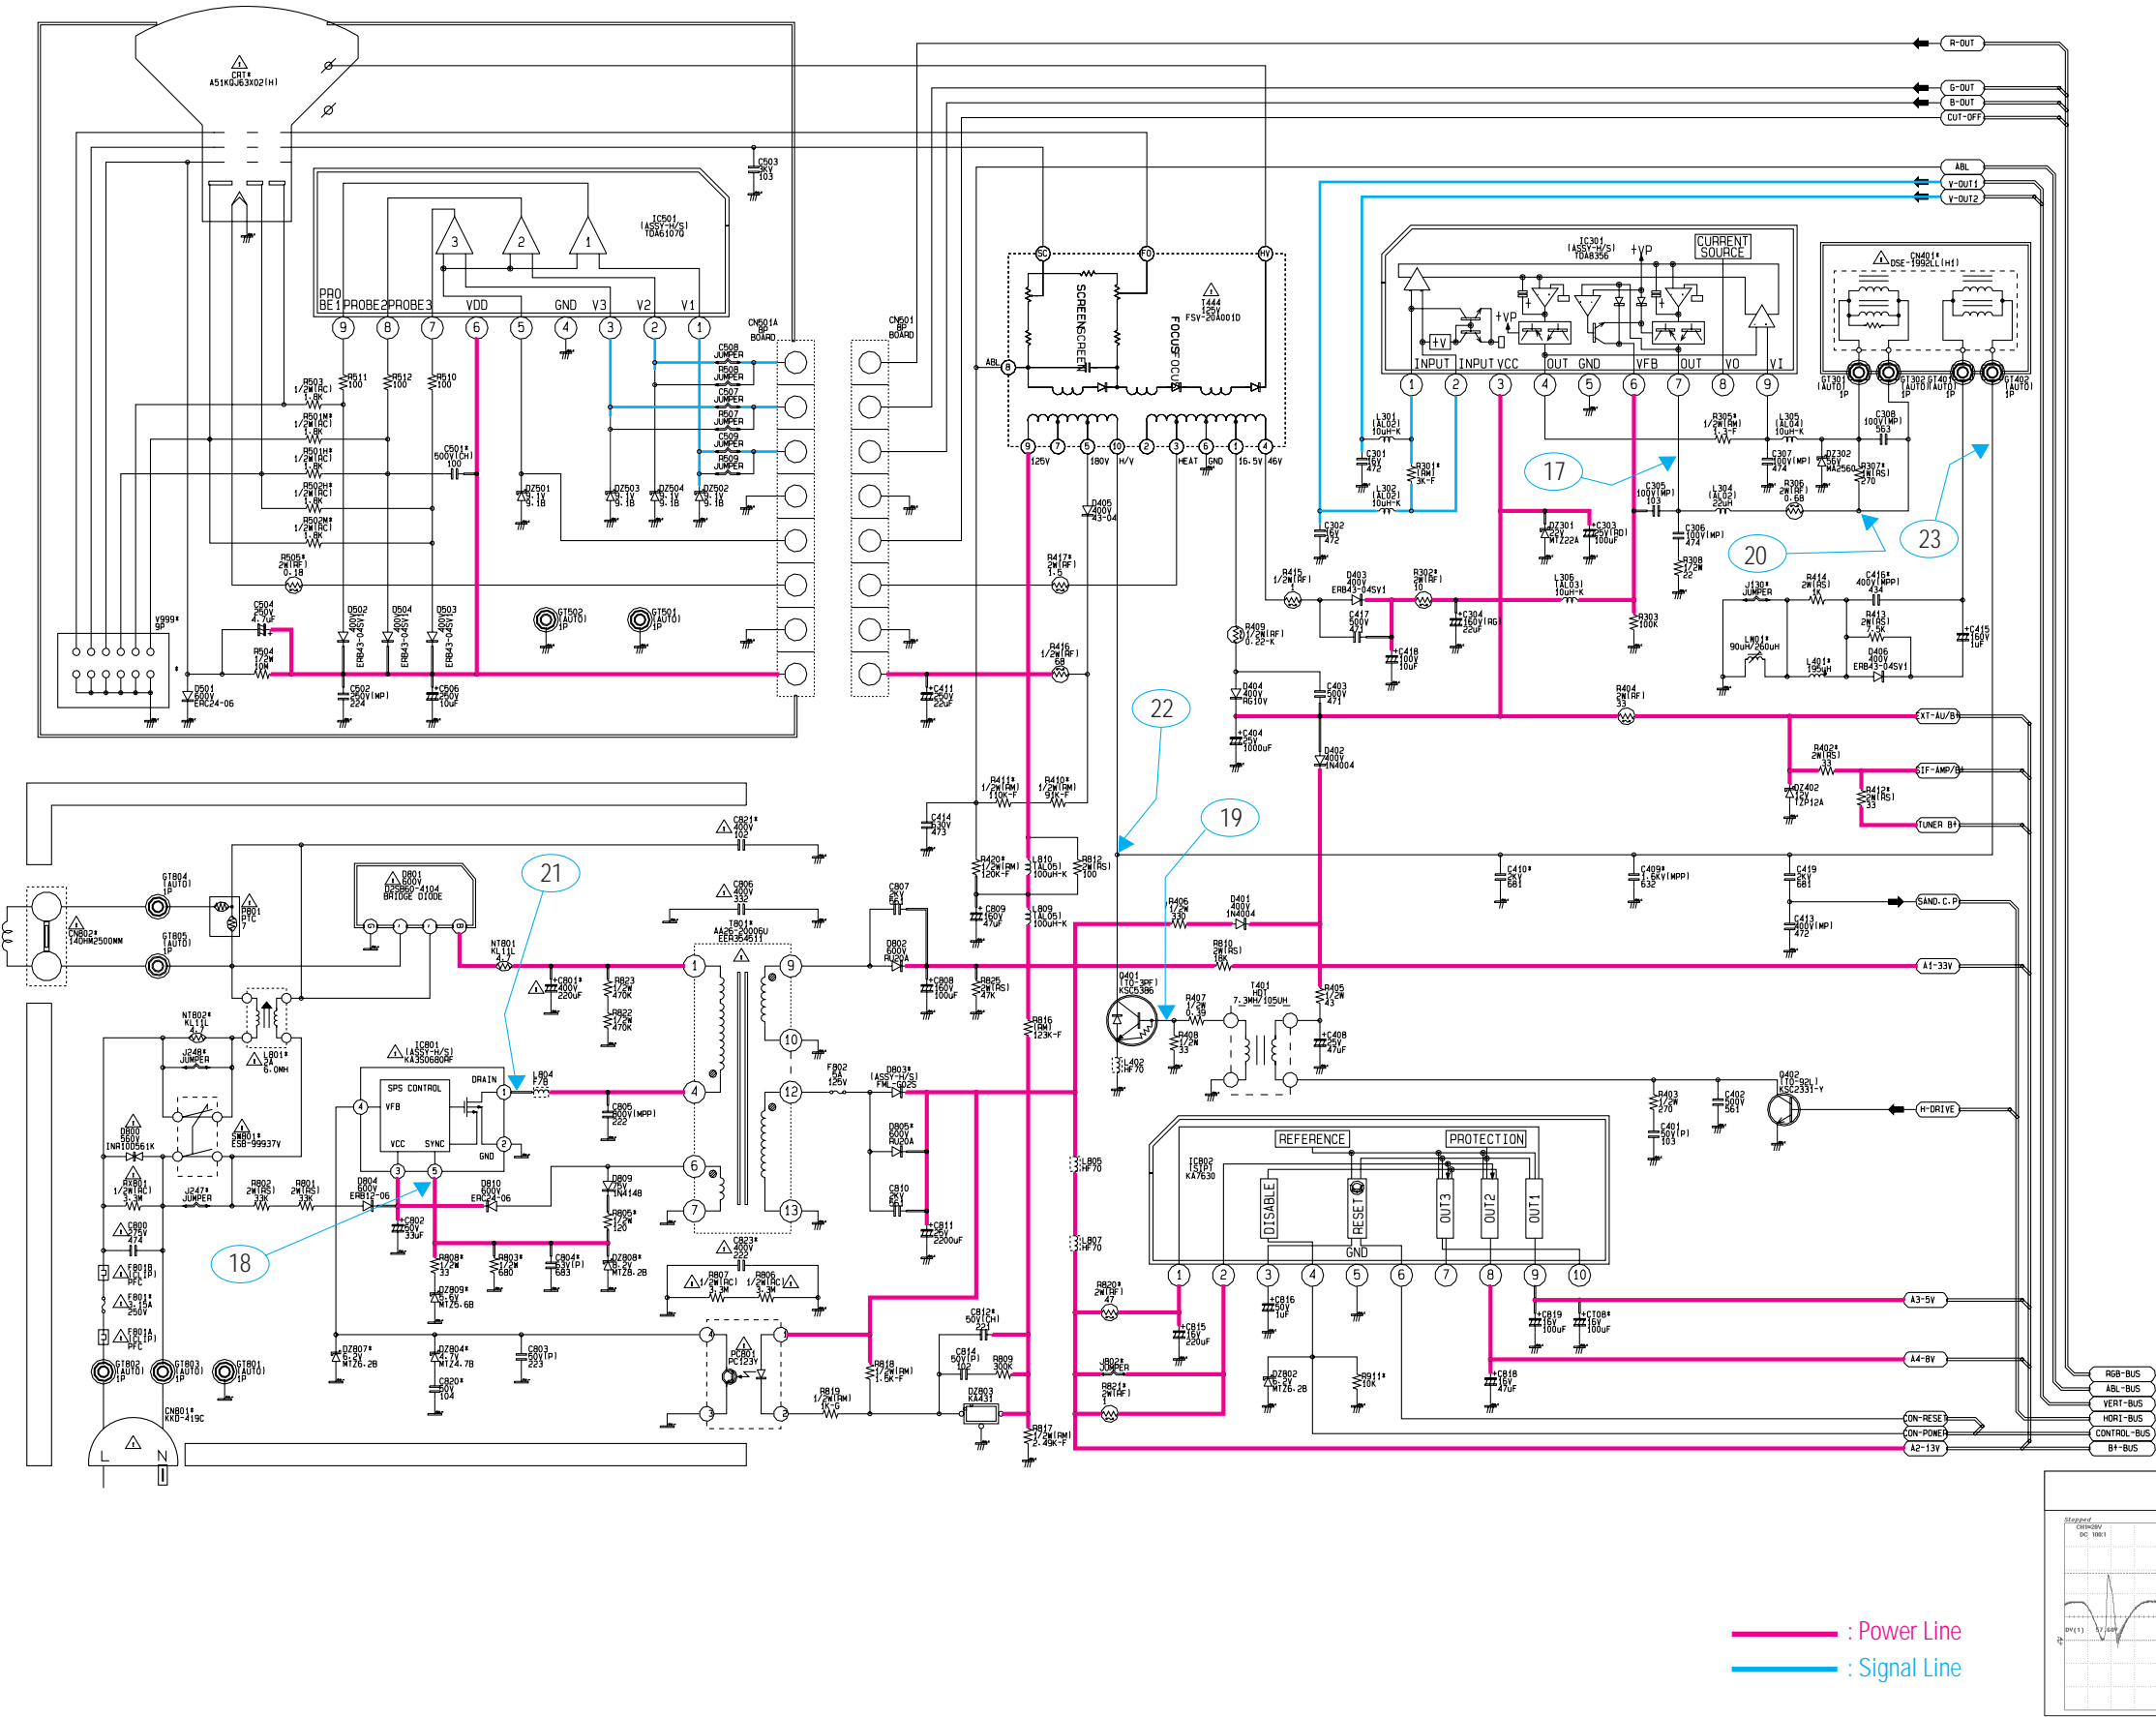







11-5 MICOM (TTX)

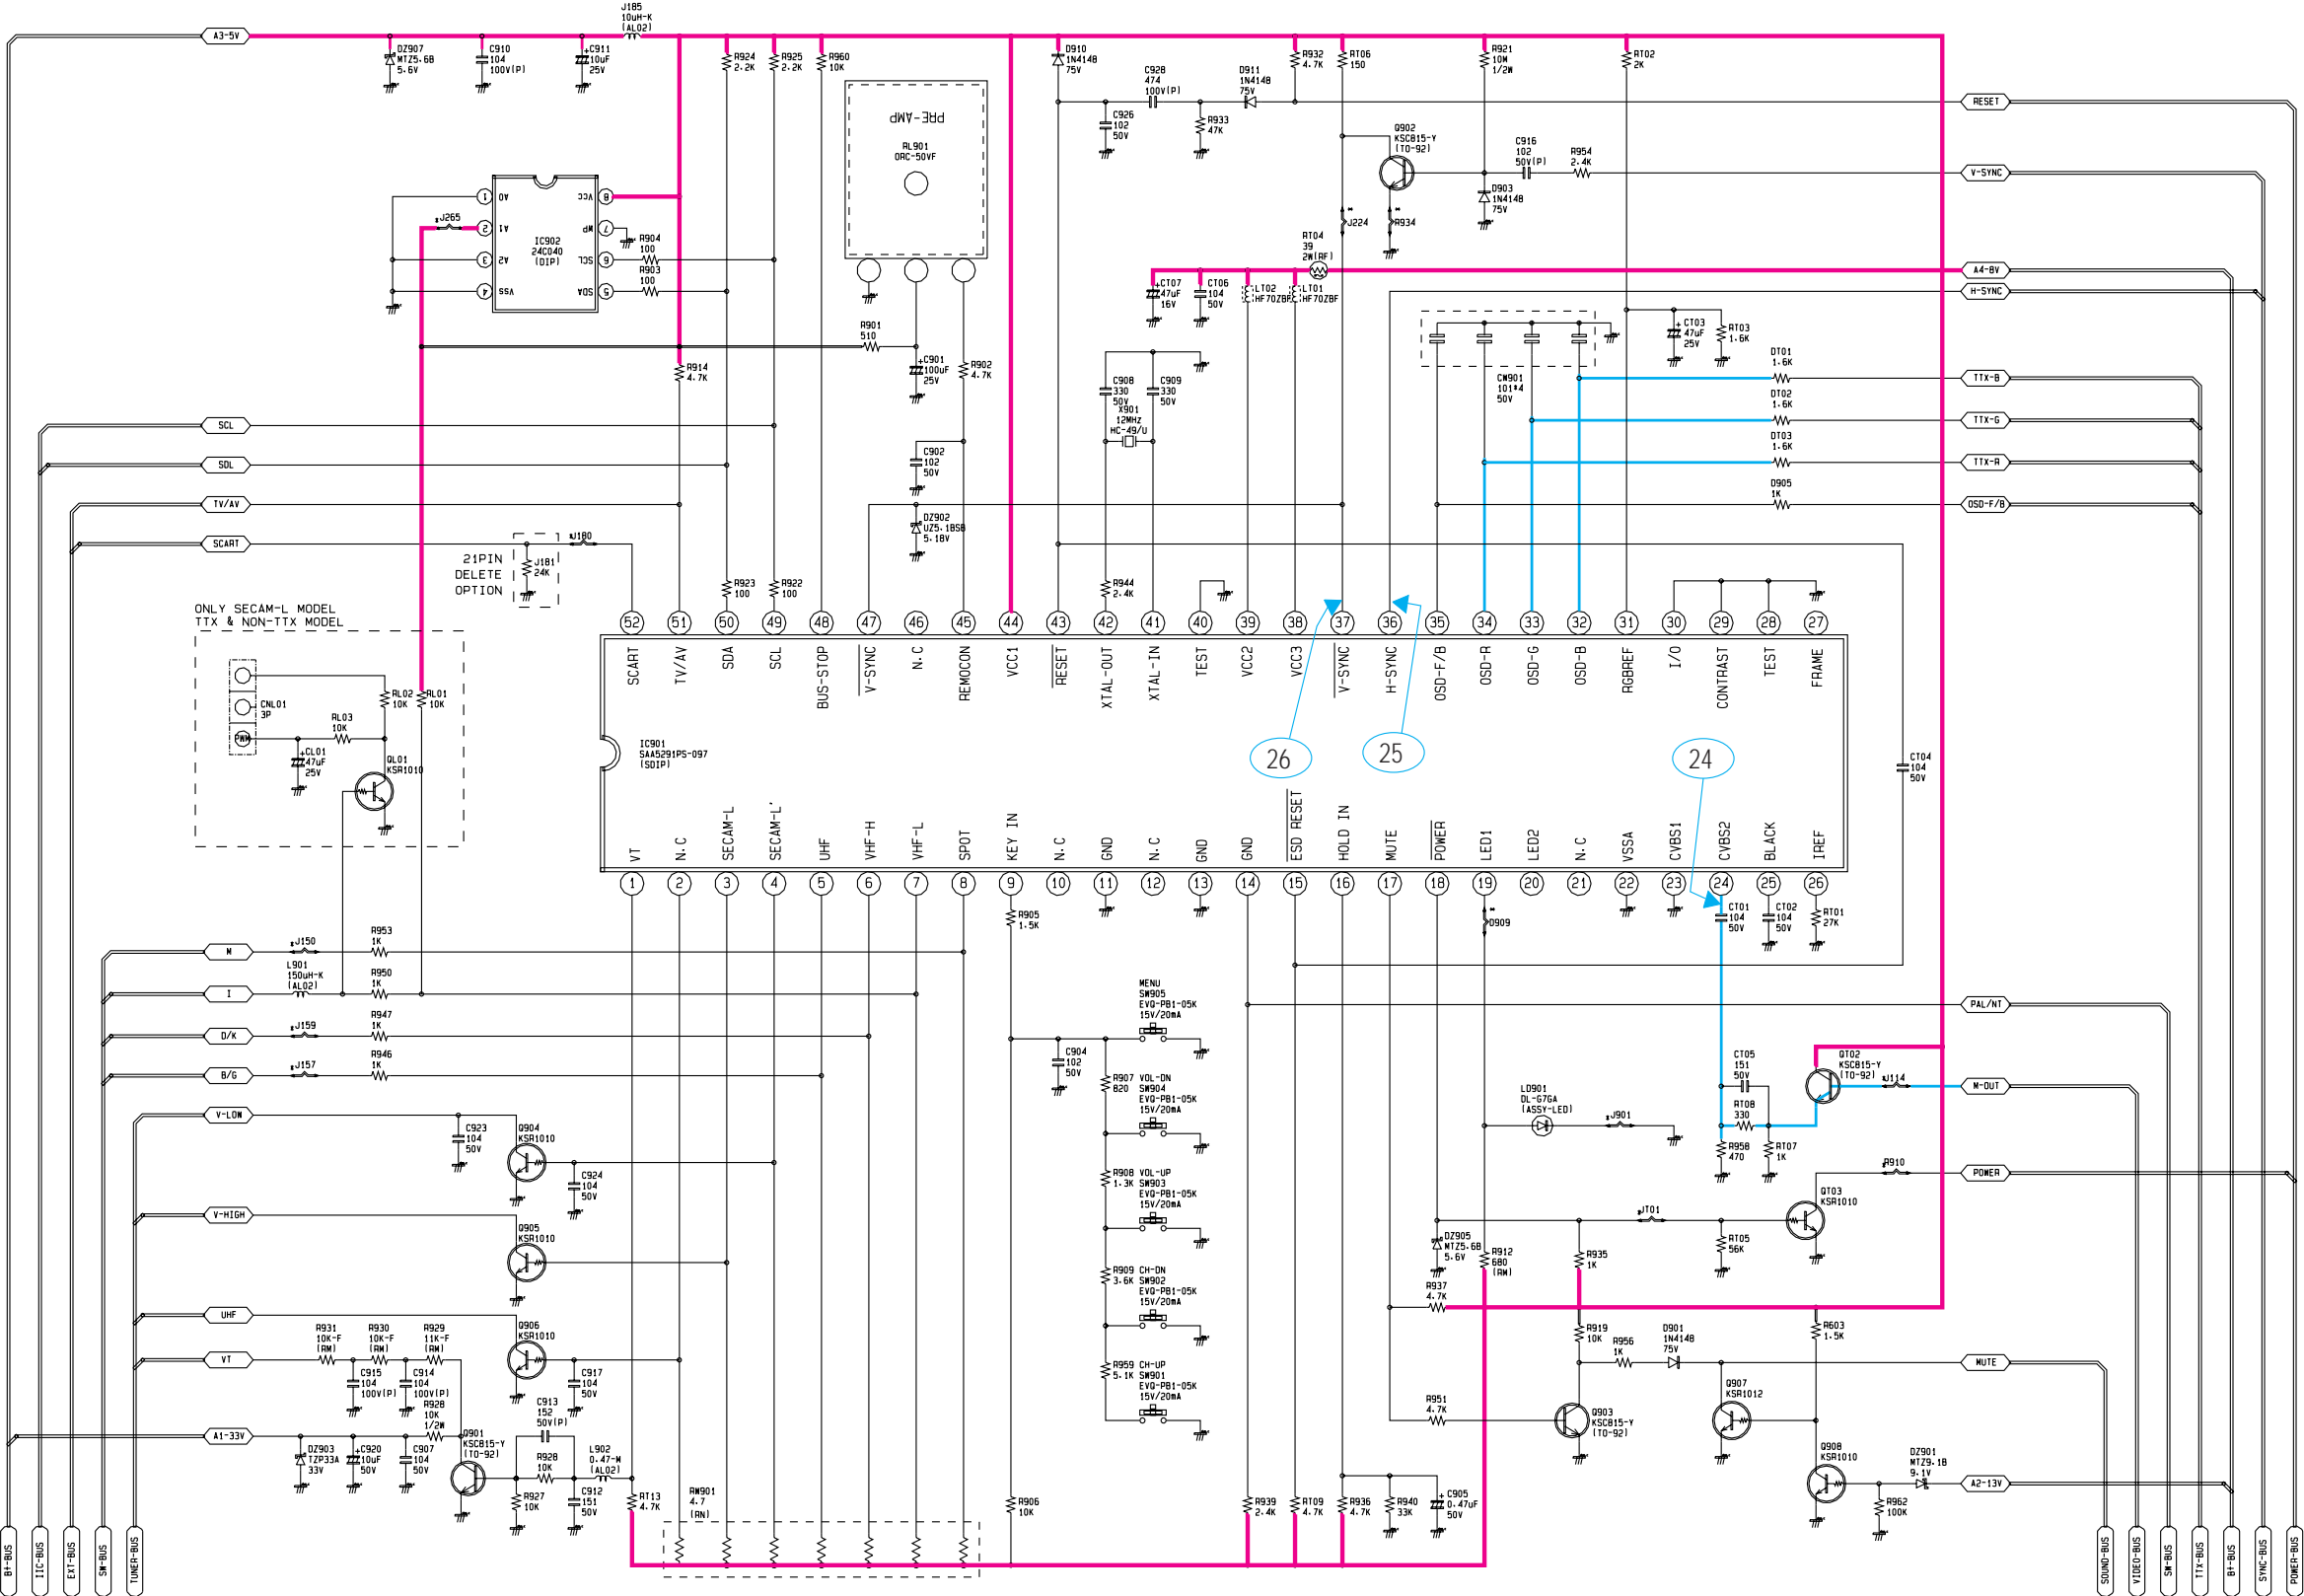

— : Power Line
— : Signal Line

Schematic Diagrams

11-6 MICOM (NON-TTX)

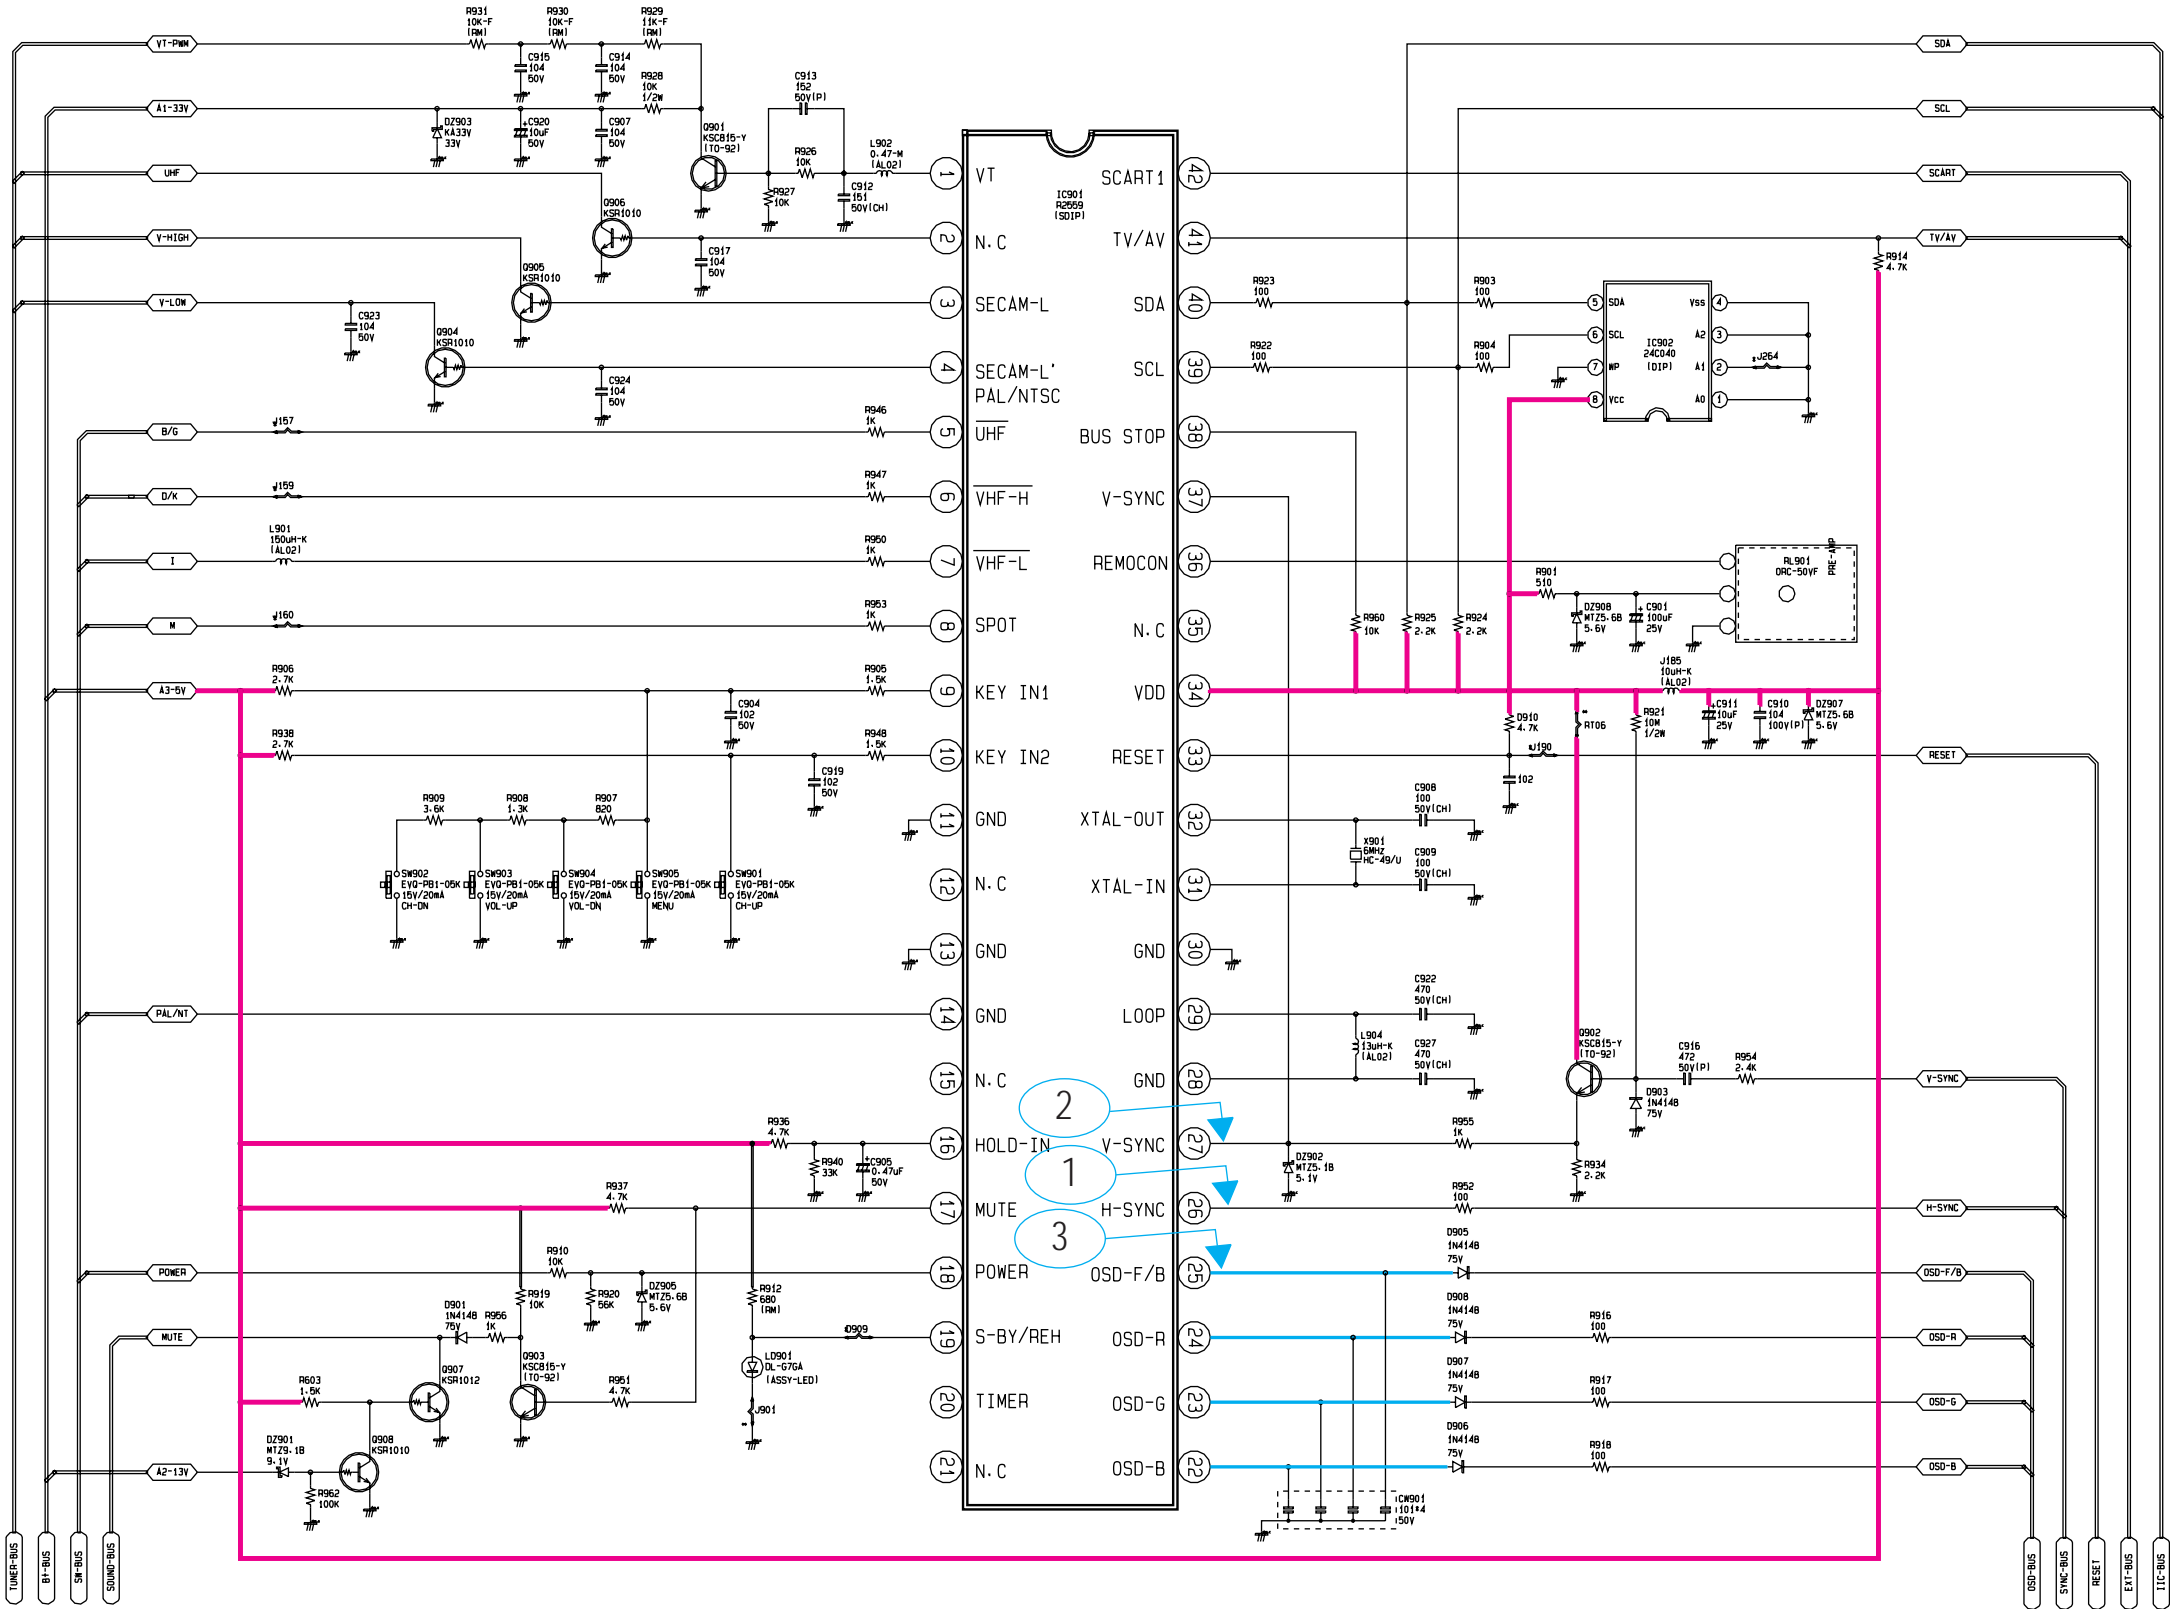

Power Line
Signal Line